


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

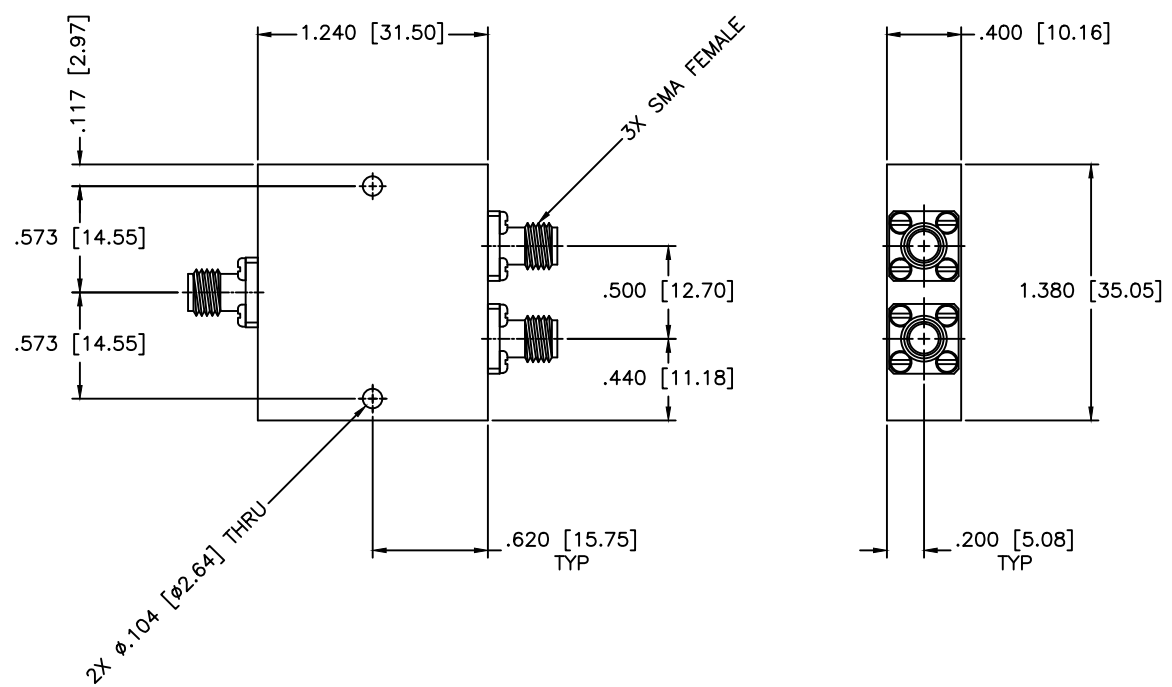

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 22dB Min.
 VSWR Input/Output: 1.25:1/1.15:1 Max.
 Phase Balance: ±2 Deg Max.
 Amplitude Balance: ±0.2dB Max.
 Power: 30 Watts

			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		2-WAY POWER DIVIDER				
PART NO.:		PS2-3				
DRAWN: Paiboon Luekhamhan	DATE: 04-15-1999	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE: N/A	REV: N/A	DWG NO.:
APPROVED: T. Nguyen	DATE: 04-15-1999			OD2L5	DO NOT SCALE THE DRAWING	