


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

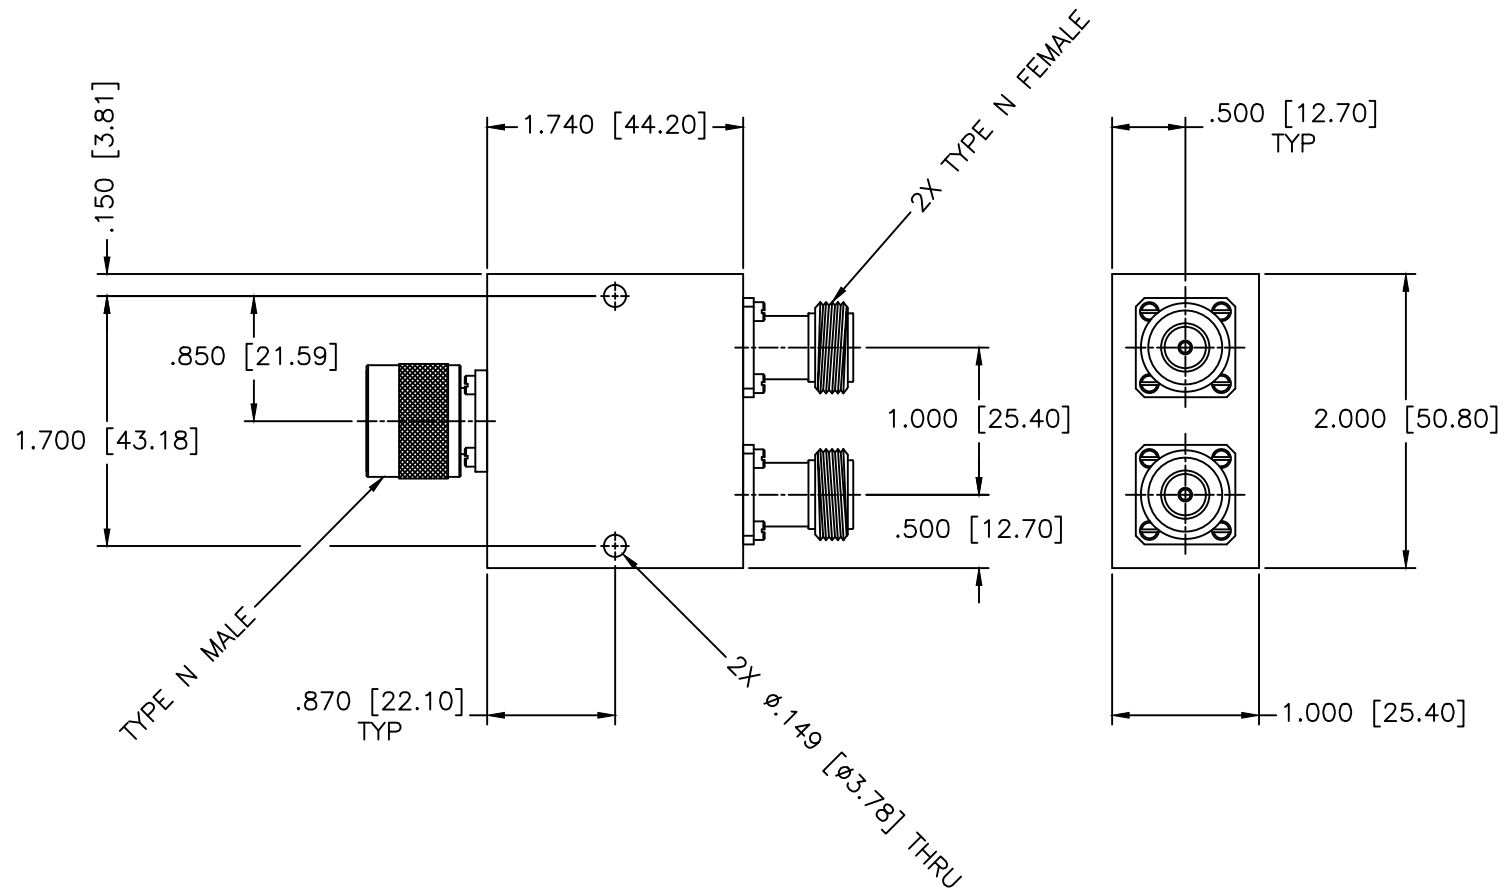

SPECIFICATIONS

Frequency Range: 0.95–2.3 GHz
Insertion Loss: 0.3dB Max.
Isolation: 17dB Min.
Power: 30W (Load vswr@1.2)
Amplitude Balance: ± 0.4 dB Max.
VSWR IN/OUT: 1.40:1 Max.
Phase Balance: ± 4 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 03-22-2005 APPROVED: T. Nguyen DATE: 03-22-2005		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
		2-WAYS POWER DIVIDERS PART NO. PS2-32/NMI		CAGE CODE: OD2L5	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION		SIZE: N/A	REV: N/A
				DO NOT SCALE THE DRAWING	
				DWG NO. 82341	