


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

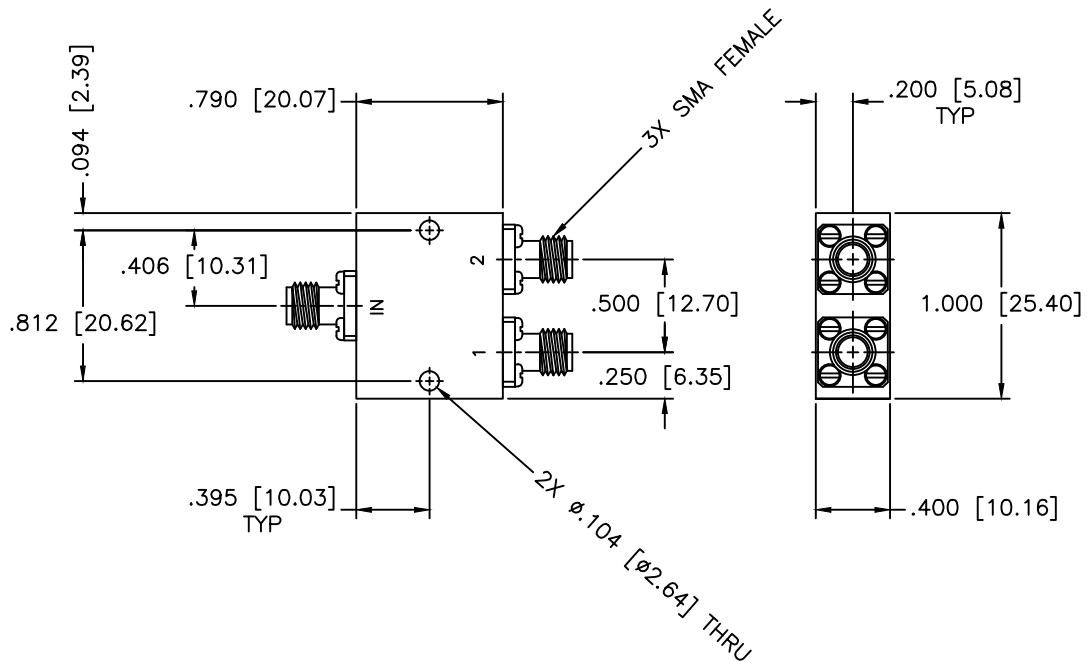

**SPECIFICATIONS**

Frequency Range: 10.95–12.75 GHz  
 Insertion Loss: 0.5dB Max.  
 Isolation: 18dB Min.  
 VSWR In/Out: 1.40:1/1.35:1 Max.  
 Amplitude Balance: ±0.3dB Max.  
 Power: 3W (Load vswr@1.2)  
 Operating Temperature: 0°C to +50°C  
 Storage Temperature: -10°C to +60°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS2-33-S</b>		
DATE: 08-13-2014		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 08-13-2014		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: N/A		
		DWG NO. XXXXX		
DO NOT SCALE THE DRAWING				