
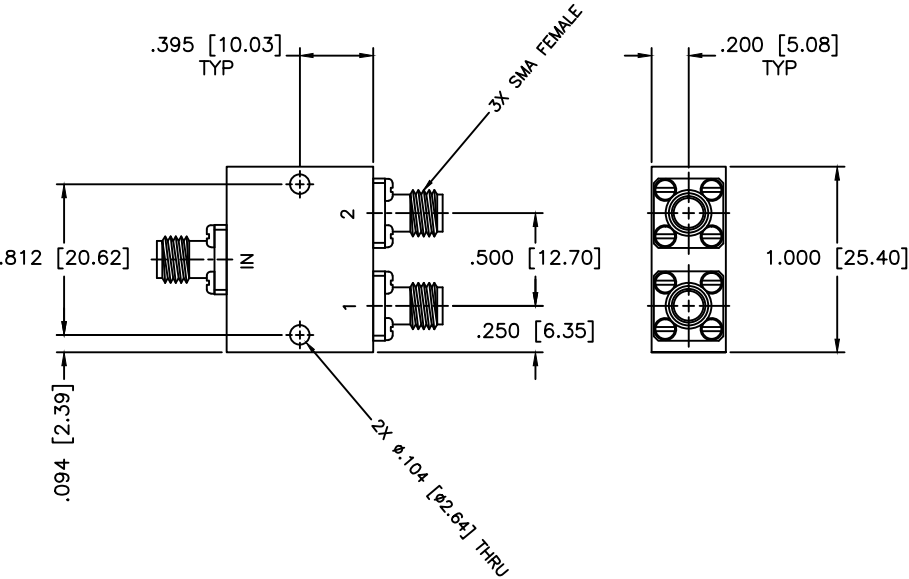



REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

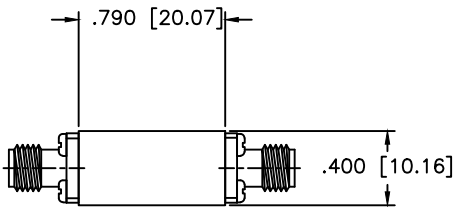

SPECIFICATIONS

Frequency Range: 6.9–8 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 22dB Min.
 VSWR In/Out: 1.25:1/1.30:1 Min.
 Phase Balance: ±4 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power: 30W (Load vswr@1.2)

DRAWN: Paiboon DATE: 05-01-2024	APPROVED: Peter Nguyen DATE: 05-01-2024
--	--



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
2-WAY POWER DIVIDER

PART NO.
PS2-39

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	A	80855
DO NOT SCALE THE DRAWING			

