


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

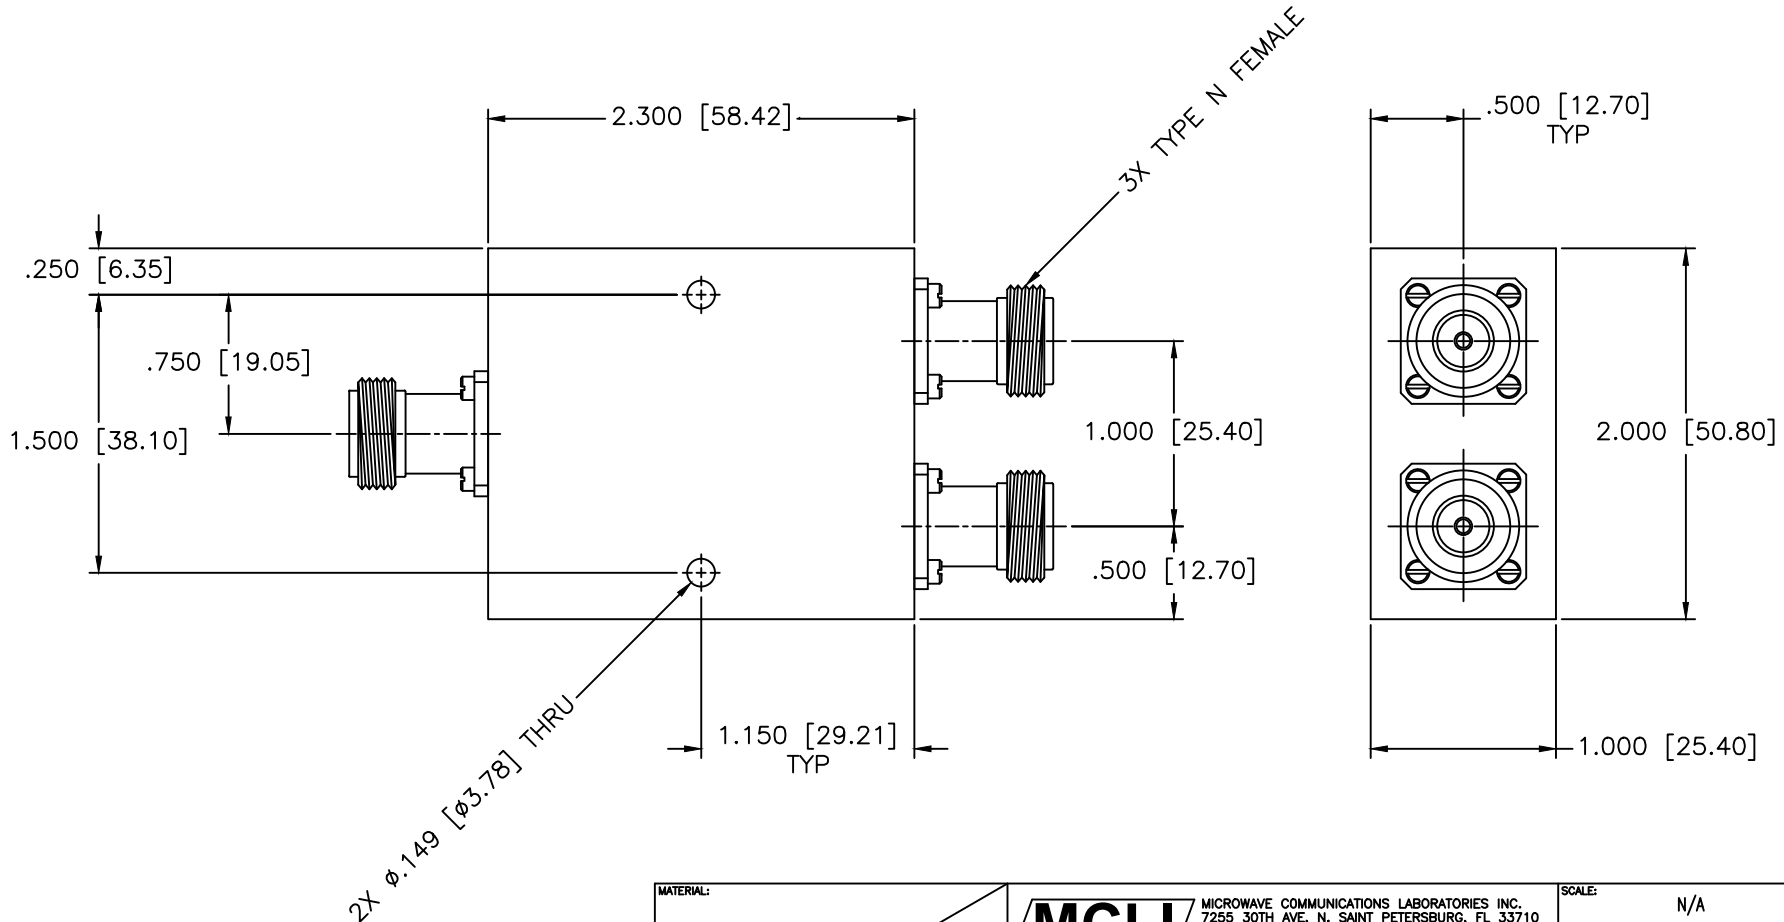

SPECIFICATIONS

Frequency Range: 0.5–2.5 GHz
 Insertion Loss: 0.3dB Max.
 Isolation: 17dB Min.
 VSWR IN/OUT: 1.40:1/1.30:1 Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 4 Deg Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS2-4-30/NF		
DATE: 06-28-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 06-28-1999		SIZE: A REV: N/A DWG NO. 81030
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		