


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

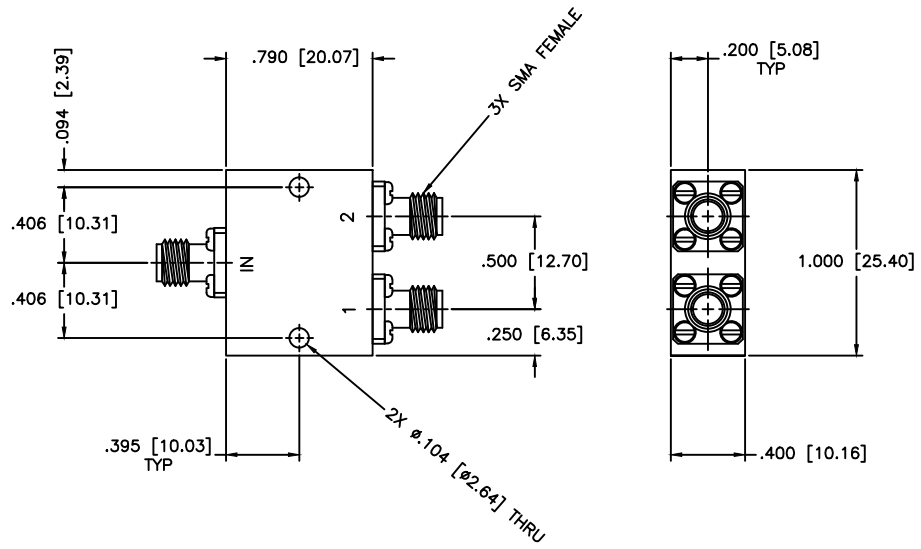

**SPECIFICATIONS**

Frequency Range: 7.9–8.9 GHz  
 Insertion Loss: 0.7dB Max.  
 Isolation: 20dB Min.  
 VSWR In/Out: 1.35:1/1.30:1 Max.  
 Phase Balance: ±4 Deg. Max.  
 Amplitude Balance: ±0.2dB Max.  
 Power: 30W (Load vswr@1.2)

				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		2-WAY POWER DIVIDER	
DRAWN:		DATE:		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		SHEET:	
Paiboon Luekhamhan		02-03-1998		PART NO.:		N/A	
APPROVED:		DATE:		CAGE CODE:		SIZE:	REV:
T. Nguyen		02-03-1998		OD2L5		N/A	N/A
				DWG NO.:		80857	
						DO NOT SCALE THE DRAWING	