


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

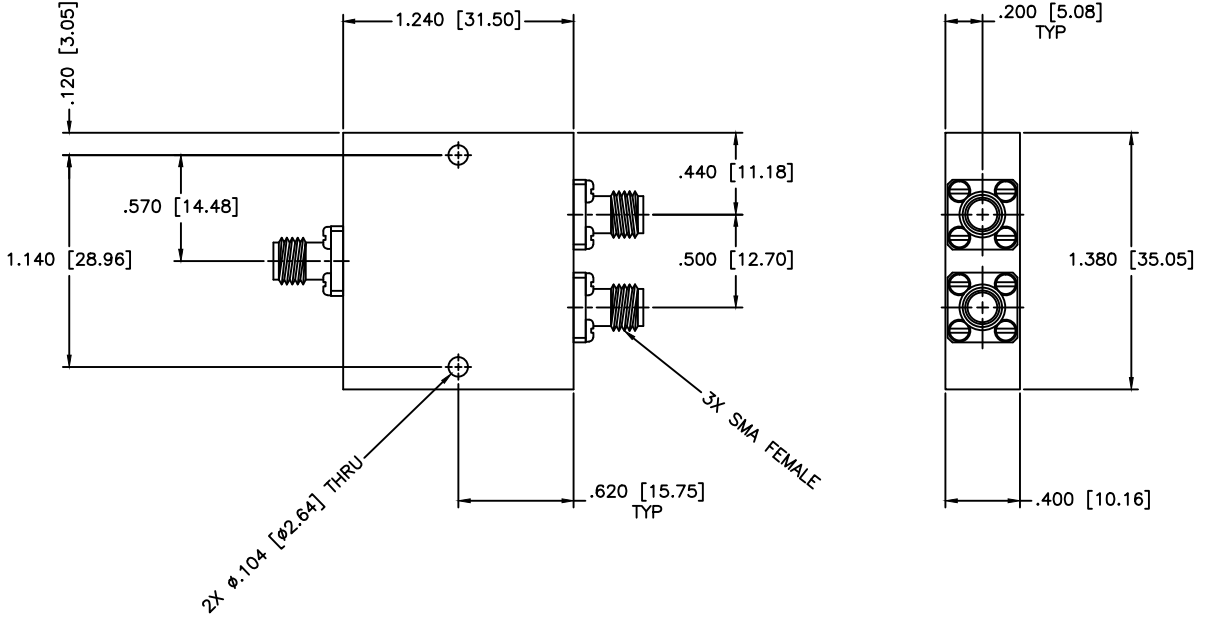

**SPECIFICATIONS**

Frequency Range: 0.8–0.9 GHz  
 Isolation: 28dB Min.  
 VSWR In/Out: 1.30:1/1.20:1 Max.  
 Insertion Loss: 0.4dB Max.  
 Amplitude Balance: ±0.2dB Max.  
 Phase Balance: ±2 Deg. Max.  
 Power: 30W (Load vswr@1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS2-52</b>		
DATE: 05-18-1999	DATE: 05-18-1999	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 05-18-1999	SIZE: N/A	REV: A	DWG NO. 80863
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		