


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

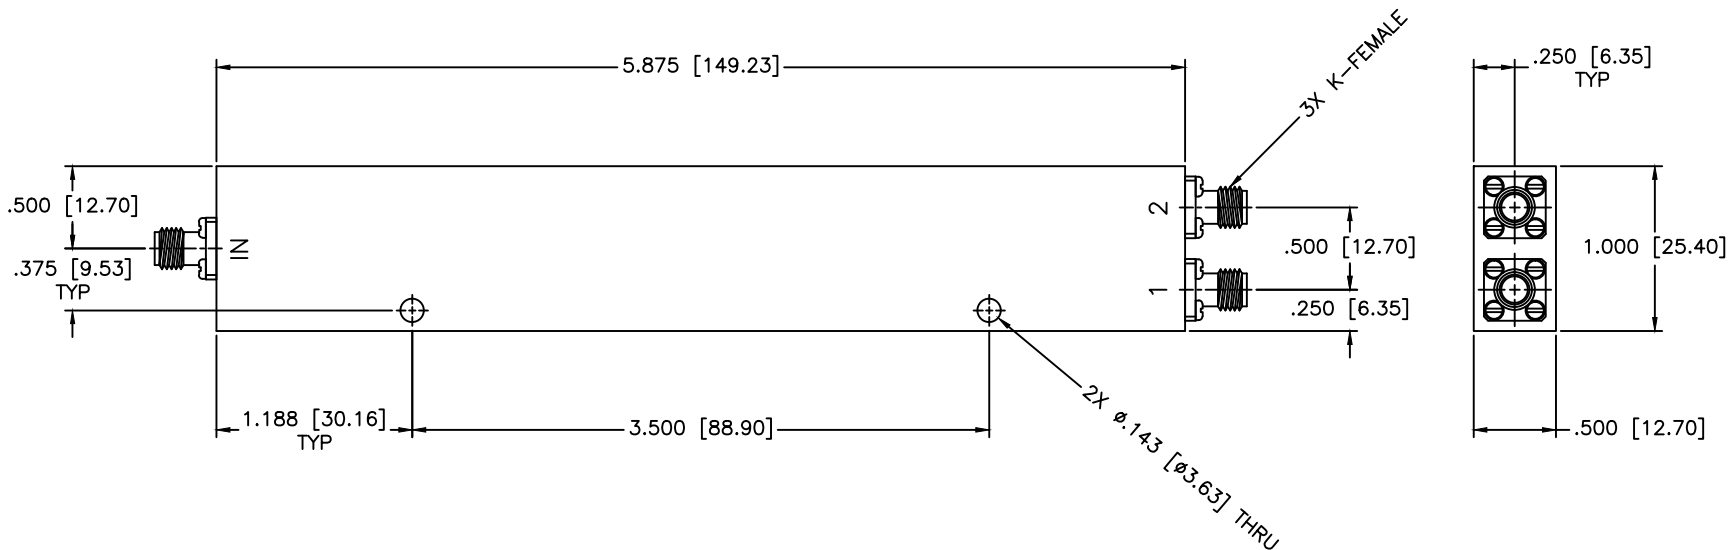

SPECIFICATIONS

Frequency Range: 8–28 GHz
 Insertion Loss: 3.6dB Max.
 Isolation: 15dB Min.
 VSWR In/Out: 1.70:1/1.60:1 Max.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±1.5dB Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.007 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS2-54		
DATE: 02-20-2009		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 02-20-2009		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: N/A		
		DWG NO. 84177		
		DO NOT SCALE THE DRAWING		