
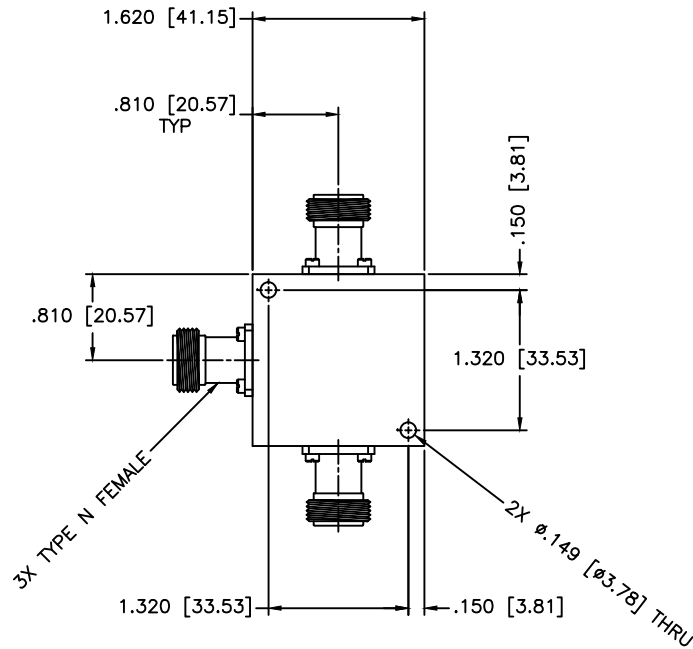


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

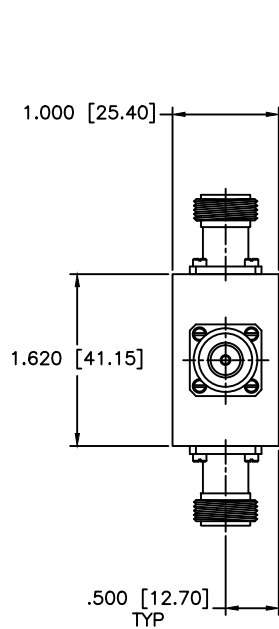

SPECIFICATIONS

Frequency Range: 0.82–1.20 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR: 1.50:1 Max.
 Phase Balance: ± 2 Deg. Max.
 Amplitude Balance: ± 0.2 dB Max.
 Power: 60W (Load vswr@1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: 2-WAY POWER DIVIDER	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: PS2-56/NF	
DRAWN: Paiboon Luekhamhan	DATE: 02-17-1998	 THIRD ANGLE PROJECTION	CAGE CODE:	0D2L5
APPROVED: T. Nguyen	DATE: 02-28-1998		SIZE:	C
		REV:	N/A	DWG. NO.: 80904
		DO NOT SCALE THE DRAWING		