


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

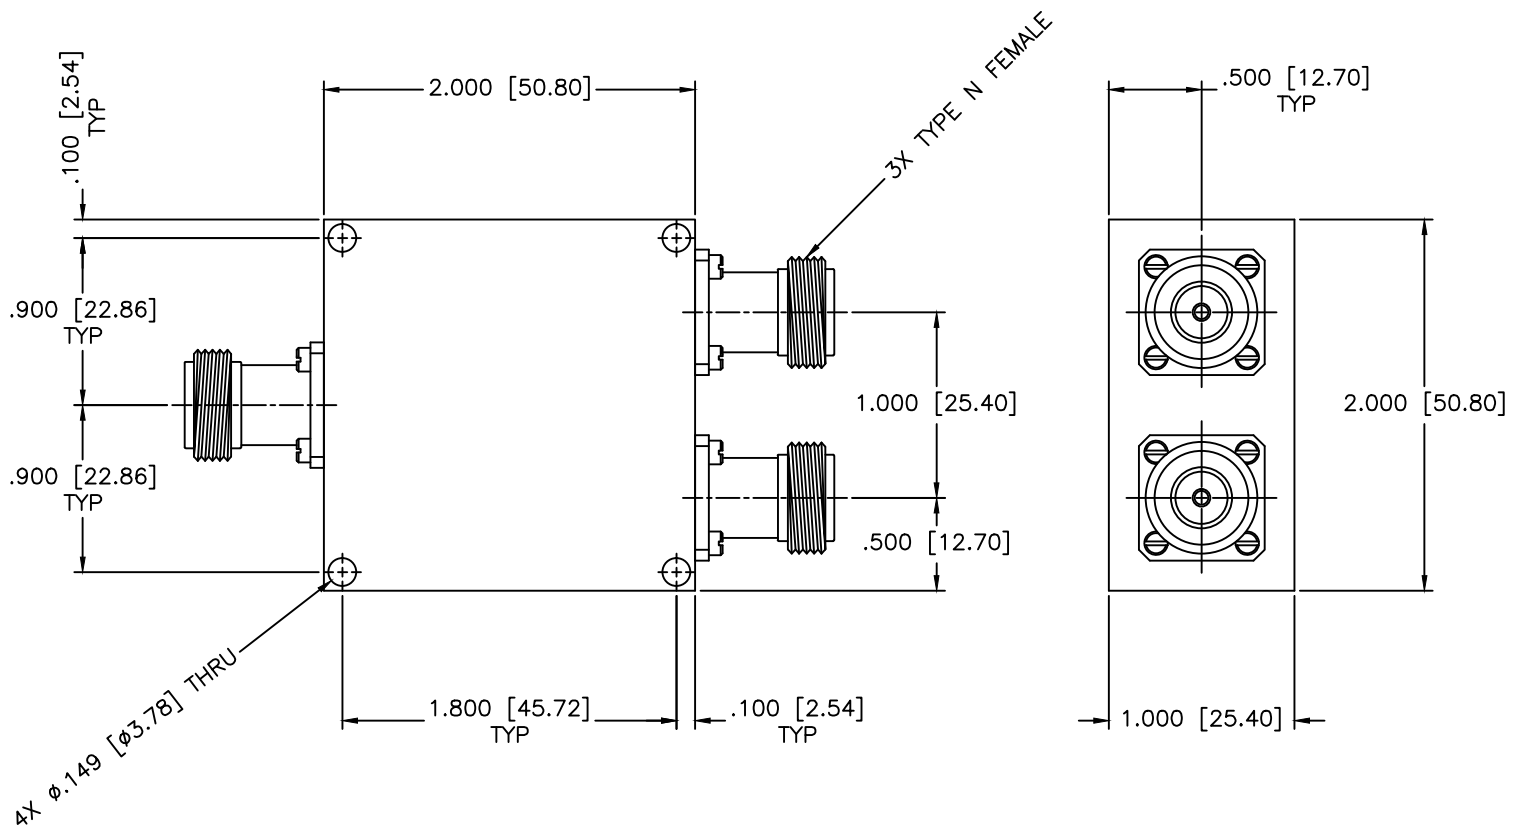

SPECIFICATIONS

Frequency Range: 0.8–0.9 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 22dB Min.
 VSWR In/Out: 1.30:1/1.20:1 Max.
 Phase Balance: ± 3 Deg. Max.
 Amplitude Balance: ± 0.2 dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS2-57/NF		CAGE CODE: OD2L5	
DRAWN: Paiboon Luekhamhan	DATE: 06-27-2007	THIRD ANGLE PROJECTION 	SIZE: A	REV: N/A	DWG NO. 80906
APPROVED: T. Nguyen	DATE: 06-27-2007	DO NOT SCALE THE DRAWING			