


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

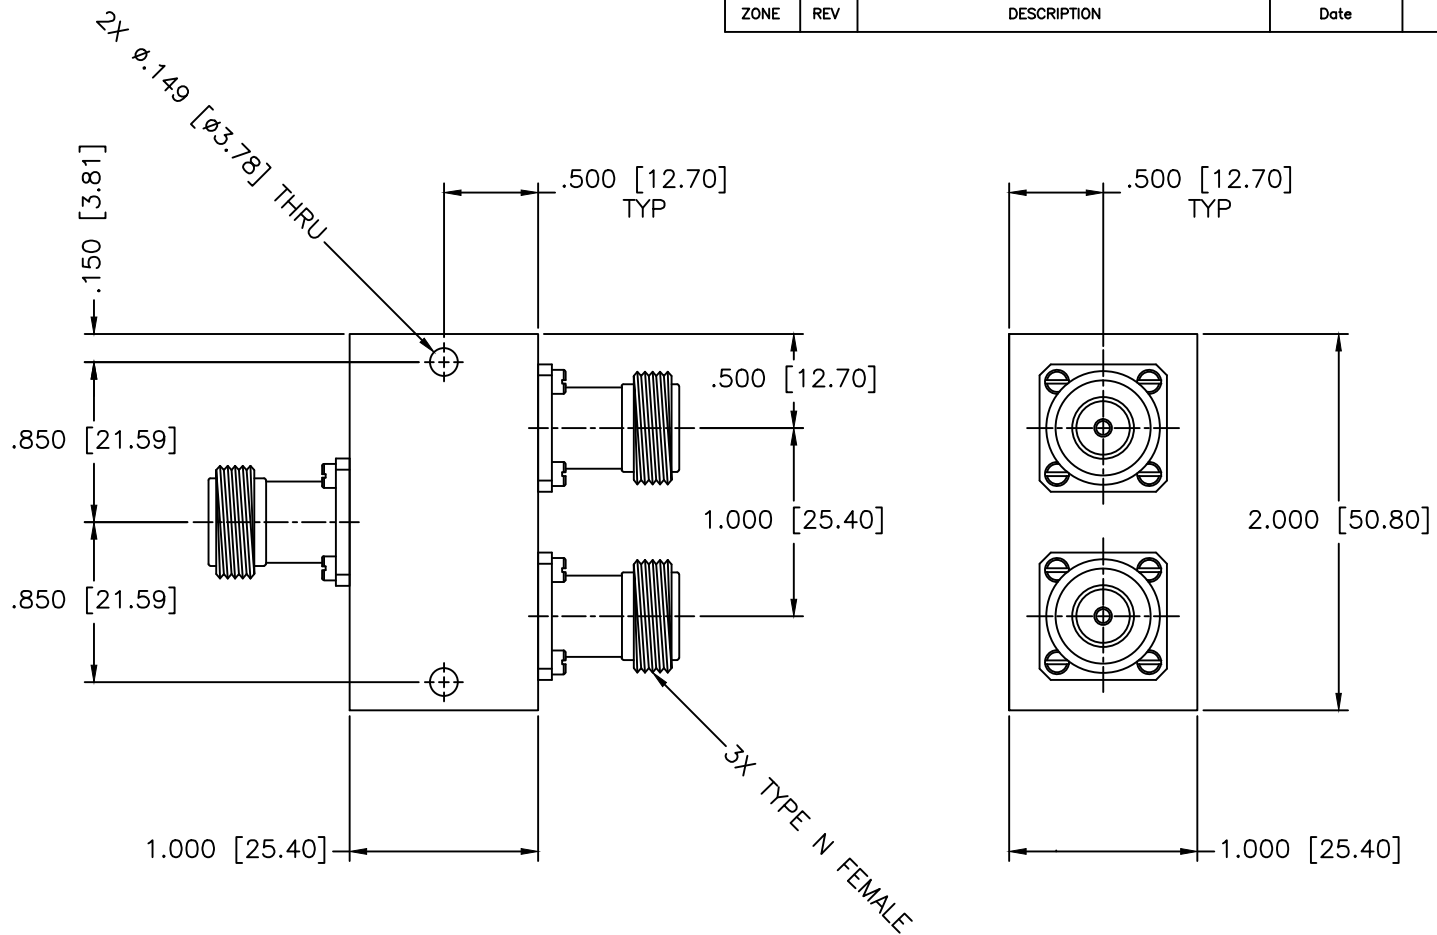

SPECIFICATIONS

- Frequency Range: 2-4 GHz
- Insertion Loss: 0.4dB Max.
- Isolation: 18dB Min.
- Power: 30W (Load vswr@1.2)
- Amplitude Balance: ±0.3dB Max.
- VSWR IN/OUT: 1.30:1/1.20:1
- Phase Balance: ±4 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO.: PS2-5/NF		
DATE: 06-28-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 06-28-1999		
<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 		SIZE: A	REV: N/A	DWG NO.: 80063
DO NOT SCALE THE DRAWING				