


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

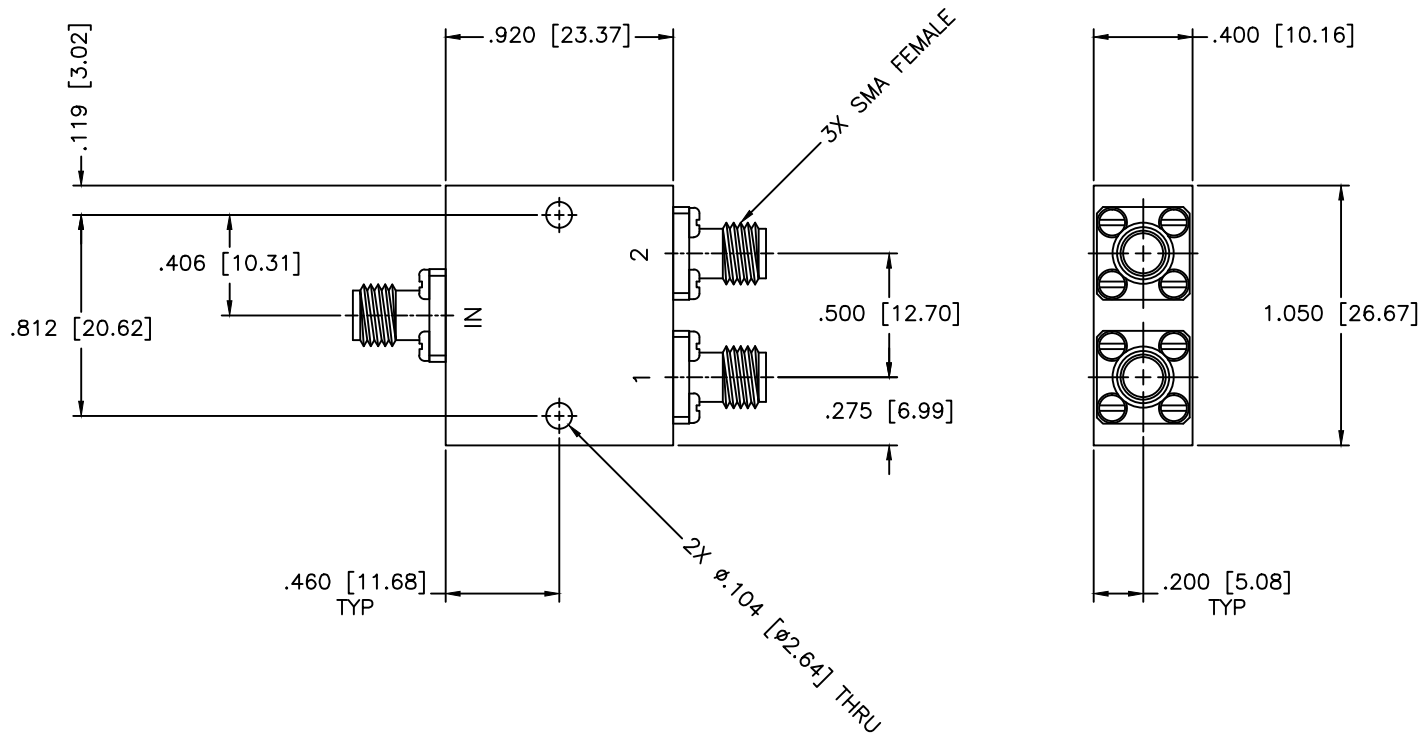

SPECIFICATIONS

Frequency Range: 4–8 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR Input/Output: 1.3051/1.25:1 Max.
 Phase Balance: ±2 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power Handling: 30 Watts

		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		2-WAY POWER DIVIDER		
PART NO.:		PS2-6		
DRAWN: Paiboon Luekhamhan	DATE: 12-19-2007	CAGE CODE: OD2L5	SIZE: N/A	REV: A
APPROVED: T. Nguyen	DATE: 12-19-2007	DO NOT SCALE THE DRAWING		DWG NO. 80017