


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

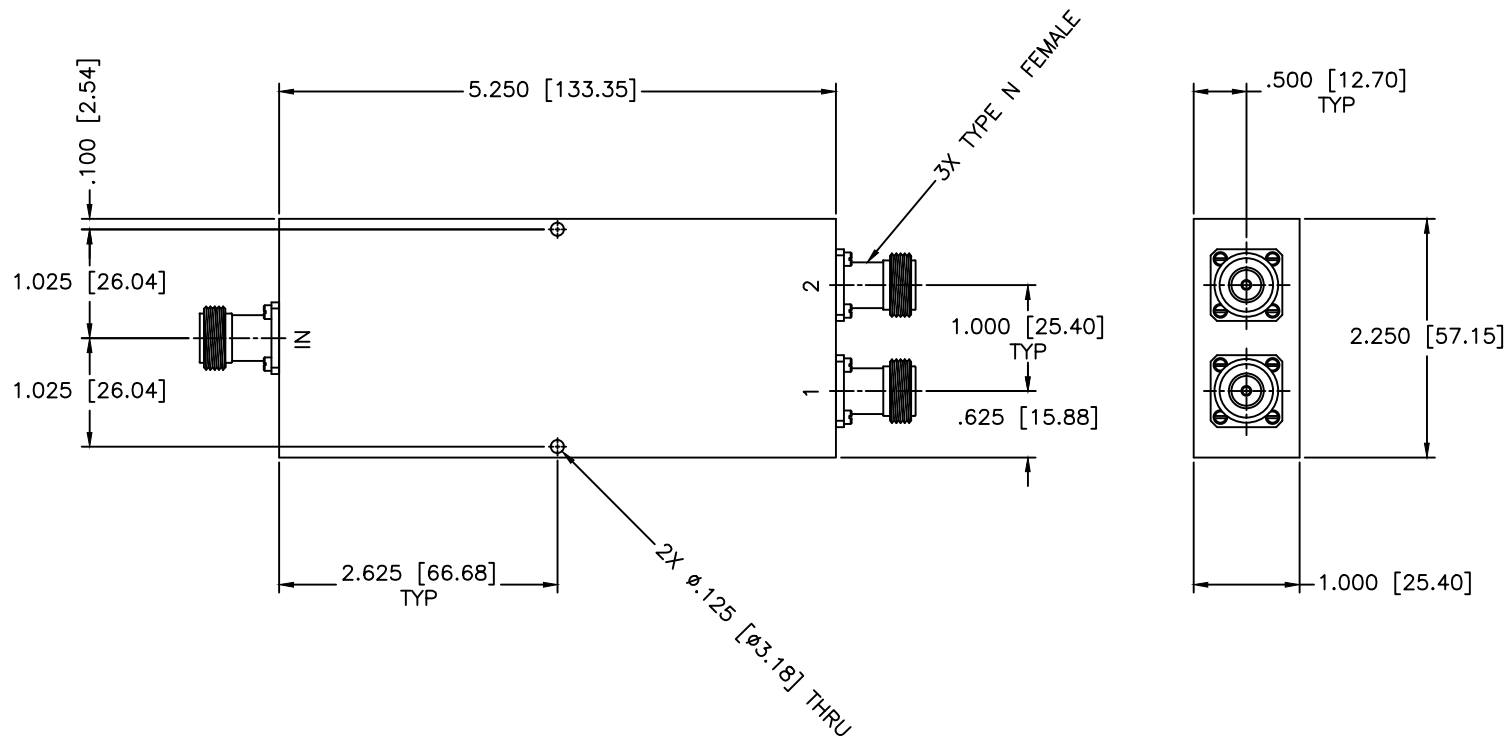

**SPECIFICATIONS**

Frequency Range: 100–400 MHz  
 Insertion Loss: 0.50dB Max.  
 Isolation: 25dB Min.  
 Power: 30W (Load vswr@1.2)  
 Amplitude Balance: ±0.3dB  
 VSWR In/Out: 1.35:1/1.25:1 Max.  
 Phase Balance: ±4 Deg. Max.

MATERIAL:		 <b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <b>PS2-68/NF</b>	
DRAWN: Paiboon Luekhamthan	DATE: 03-05-2012	 THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 03-05-2012		SIZE:	N/A
		REV:	B	DWG NO.: 86009
		DO NOT SCALE THE DRAWING		