


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

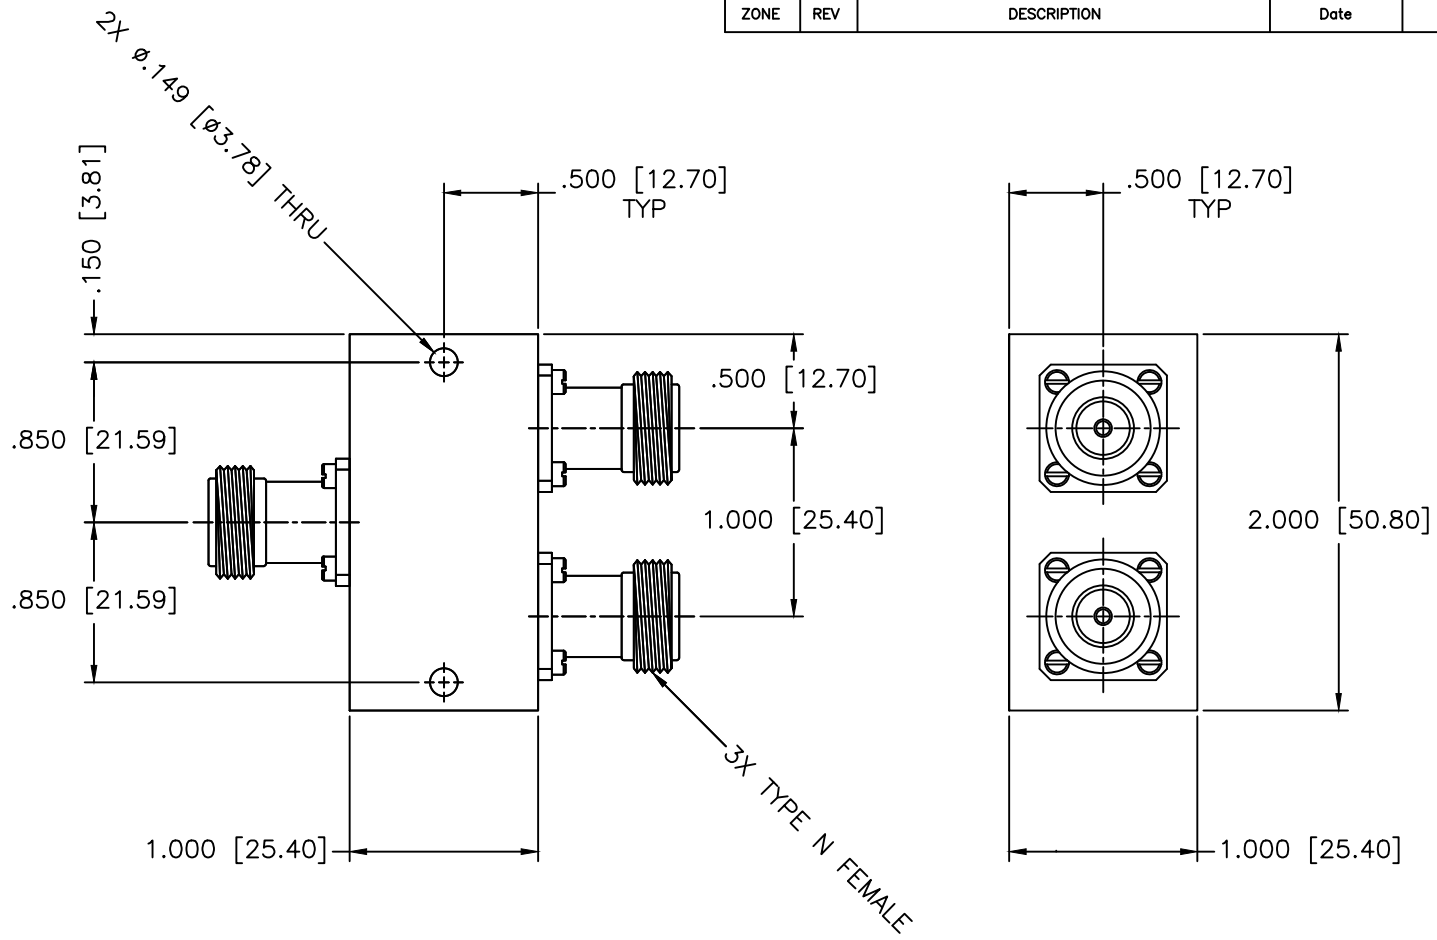

SPECIFICATIONS

Frequency Range: 4–8 GHz
 Insertion Loss: 0.7dB Max.
 Isolation: 17dB Min.
 VSWR Input/Output: 1.50:1/1.45:1 Max.
 Phase Balance: ±8 Deg. Max.
 Amplitude Balance: 0.2dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°				DRAWING TITLE:	2-WAY POWER DIVIDER
PROPRIETARY NOTES: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	PS2-6/NF		
DRAWN: Paiboon Luekhamhan	DATE: 06-28-1999	CAGE CODE:	SIZE: A	REV: N/A	DWG NO. 80064
APPROVED: T. Nguyen	DATE: 06-28-1999	OD2L5	DO NOT SCALE THE DRAWING		