


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

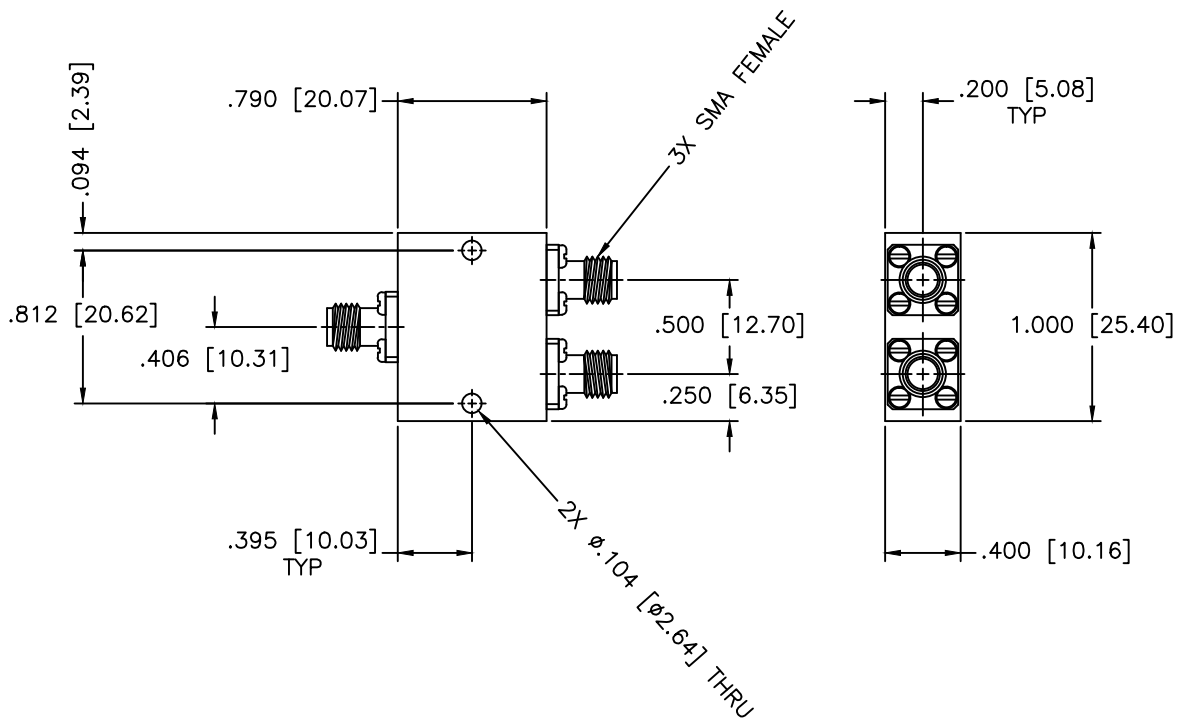

SPECIFICATIONS

Frequency Range: 17–22 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 13dB Min.
 VSWR: 2.00:1 Max.
 Phase Balance: ±12 Deg. Max.
 Amplitude Balance: ±0.8dB Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A			
			SHEET:	N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 2-WAY POWER DIVIDERS				
		PRECEDENCE NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS2-77				
DRAWN: Paiboon Luekhamhan	DATE: 04-12-1999	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5			
APPROVED: T. Nguyen	DATE: 04-12-1999		SIZE:	A	REV:	N/A	DWG NO.:
		DO NOT SCALE THE DRAWING					