


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

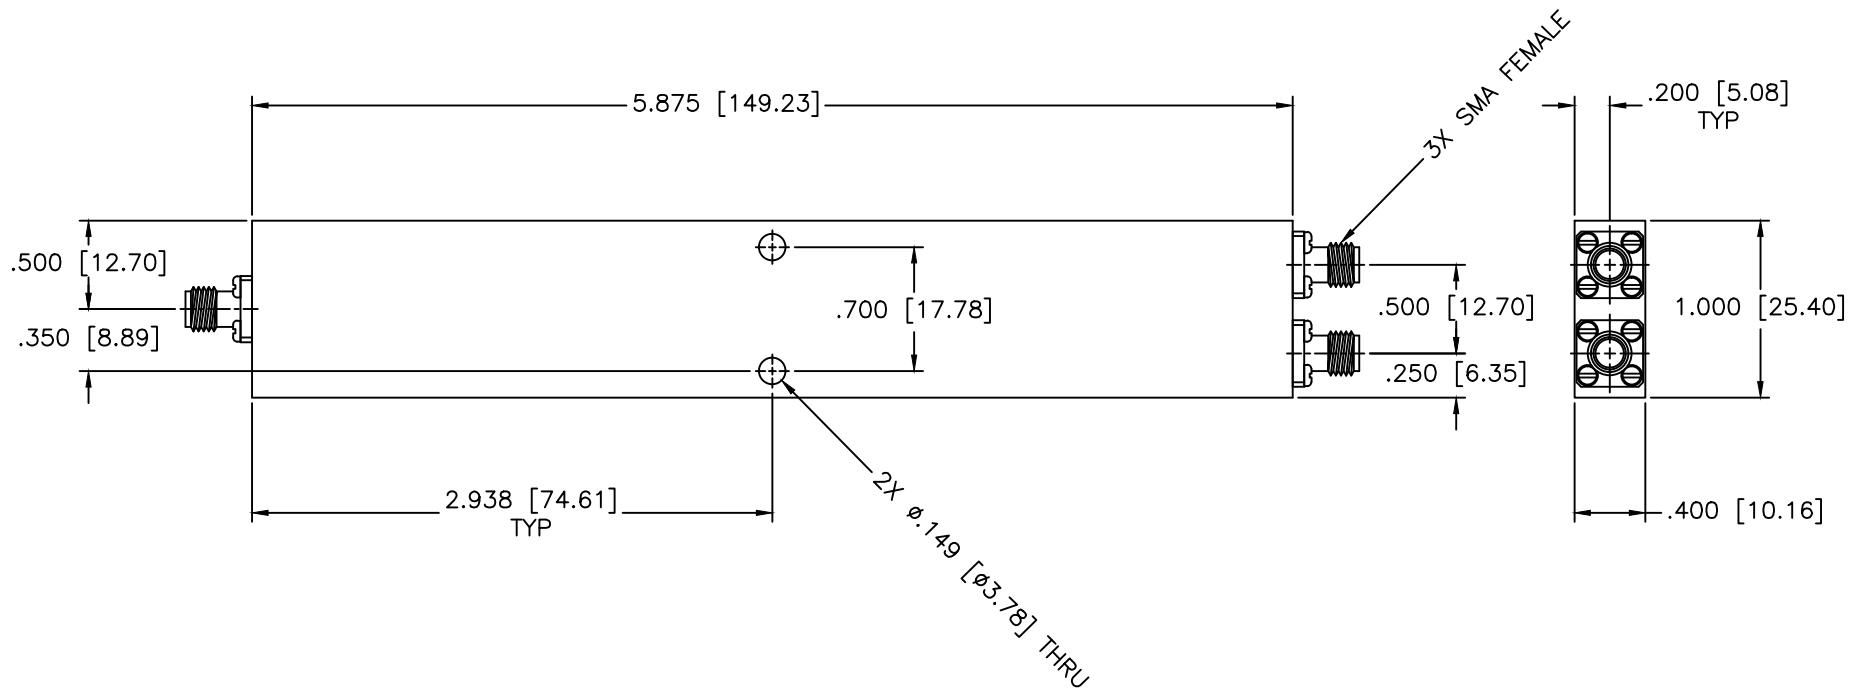

**SPECIFICATIONS**

Frequency Range: 0.8–16.5 GHz  
 Insertion Loss: 1.5dB Max.  
 Isolation: 17dB Min.  
 VSWR In/Out: 1.70:1/1.60:1 Max.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: 0.3dB Max.  
 Power: 10W (Load vswr@1.2)  
 Operating Temperature: -55°C to +85°C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS2-82</b>		
DATE: 02-16-1998		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 02-16-1998		
THIRD ANGLE PROJECTION		SIZE: N/A		
		REV: A		
		DWG NO. 80878		
DO NOT SCALE THE DRAWING				