


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

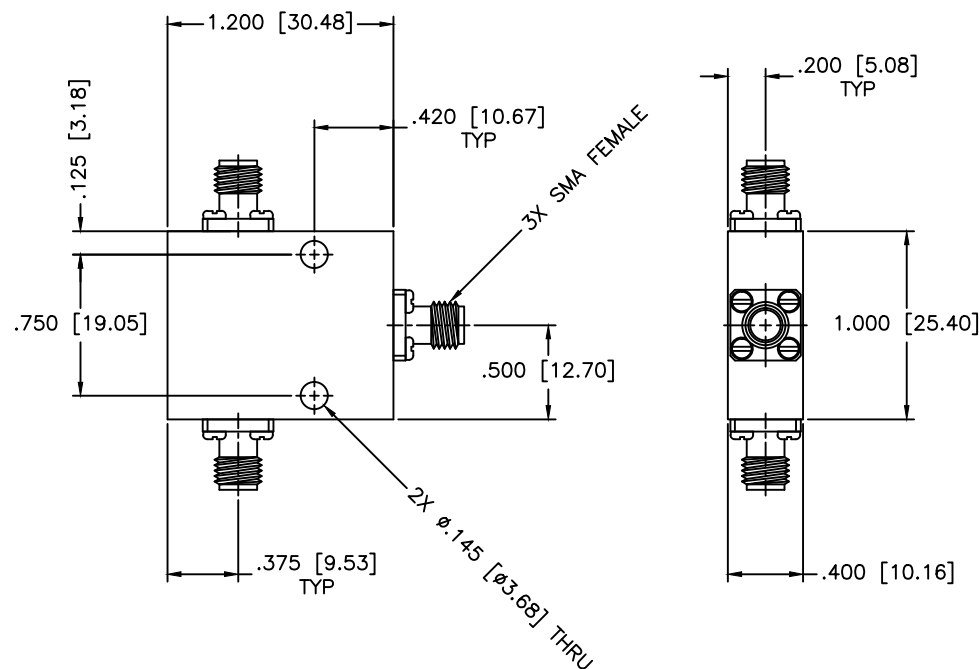

SPECIFICATIONS

Frequency Range: 8–12.4 GHz
Isolation: 20dB Min.
VSWR In/Out: 1.35:1/1.30:1 Max.
Insertion Loss: 0.5dB Max.
Amplitude Balance: ± 0.2 dB Max.
Phase Balance: ± 3 Deg. Max.
Power: 30W (Load vswr@1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 10-19-1998		DRAWING TITLE: 2-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 10-19-1998		PART NO.: PS2-8/S	
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	
				SIZE: A REV: N/A DO NOT SCALE THE DRAWING	
				DWG NO. 80798	