


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

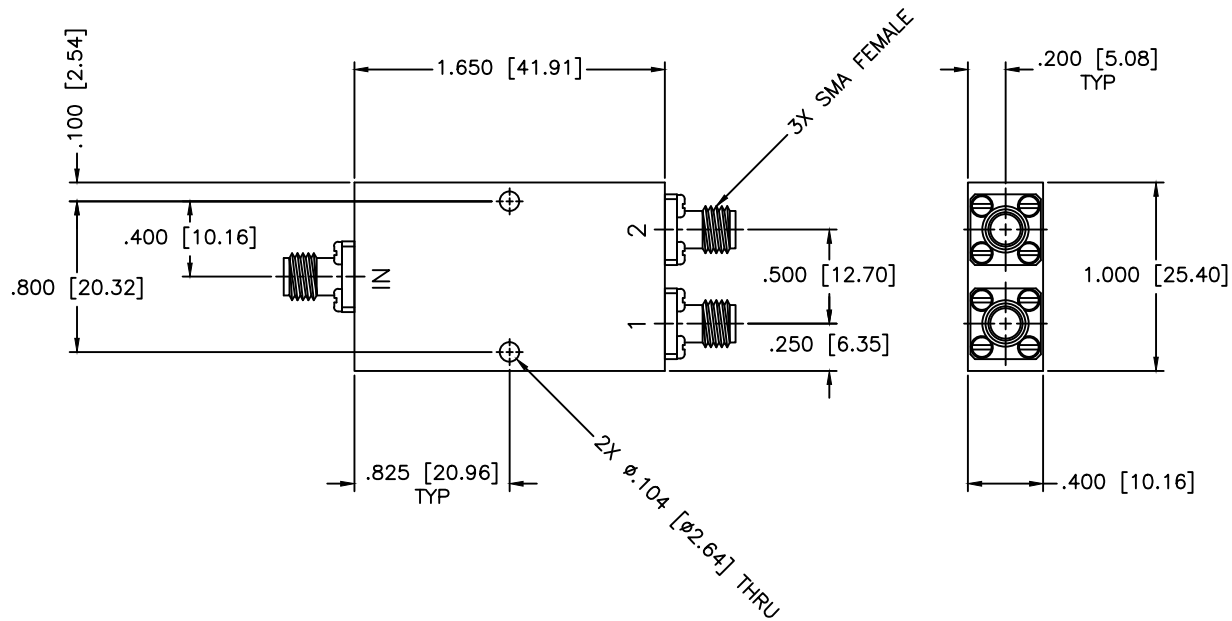

SPECIFICATIONS

Frequency Range: 1.5–3.0 GHz
 Insertion Loss: 0.35dB Max.
 Isolation: 20dB Min.
 VSWR In/Out: 1.35:1/1.25:1 Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±3 Deg. Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS2-96		
DATE: 12-11-1997		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-11-1997		SIZE: A
THIRD ANGLE PROJECTION		REV: N/A		DWG NO. 81519
		DO NOT SCALE THE DRAWING		