


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

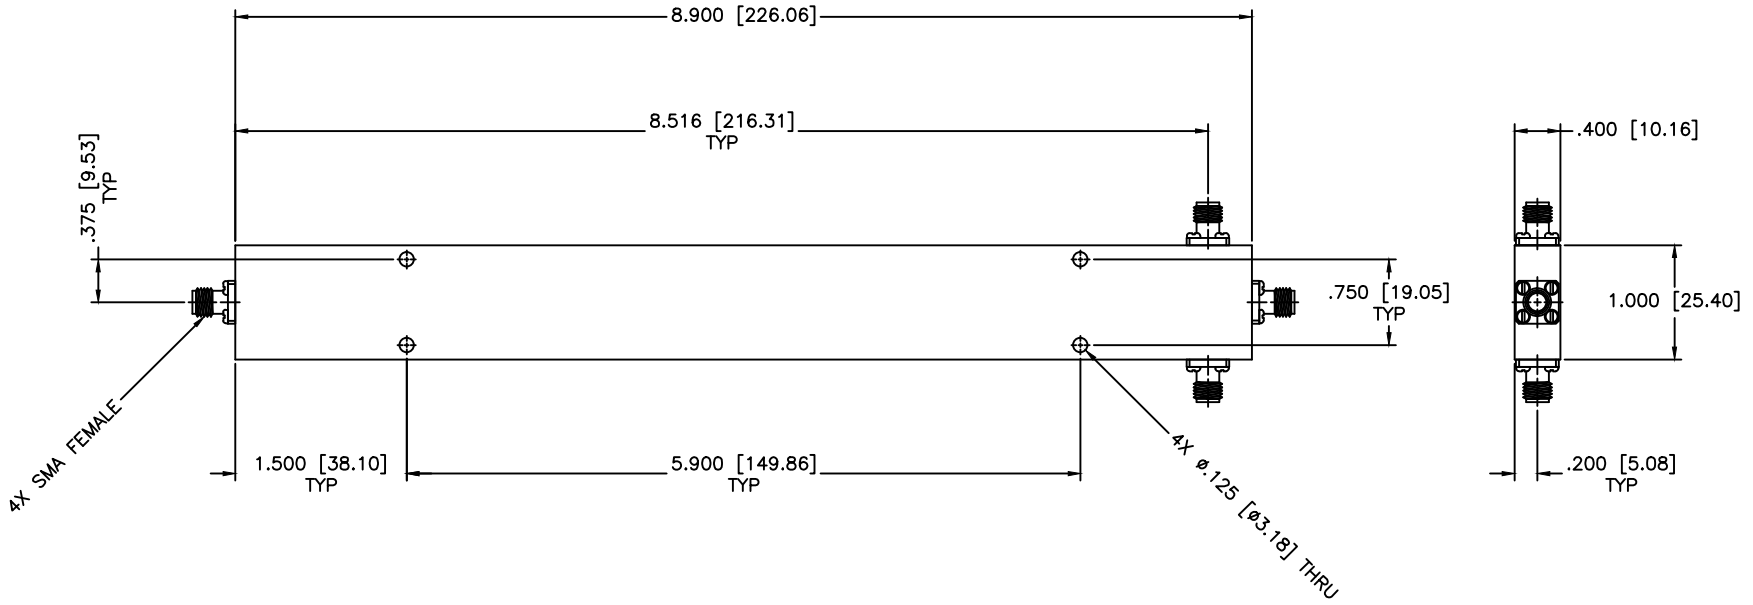

**SPECIFICATIONS**

Frequency Range: 0.5–1.0 GHz  
 Insertion Loss: 0.8dB Max.  
 Isolation: 17dB Min.  
 VSWR In/Out: 1.35:1/1.30:1 Max.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: ±0.3dB Max.  
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		3-WAY POWER DIVIDER	
DRAWN:		Paiboon Luekhamhan		DATE:		10-18-1997	
APPROVED:		T. Nguyen		DATE:		10-18-1997	
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:		PS3-1		CAGE CODE:	
THIRD ANGLE PROJECTION		OD2L5		SIZE:		N/A	
				REV:		N/A	
				DWG NO.:		80077	
				DO NOT SCALE THE DRAWING			