


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

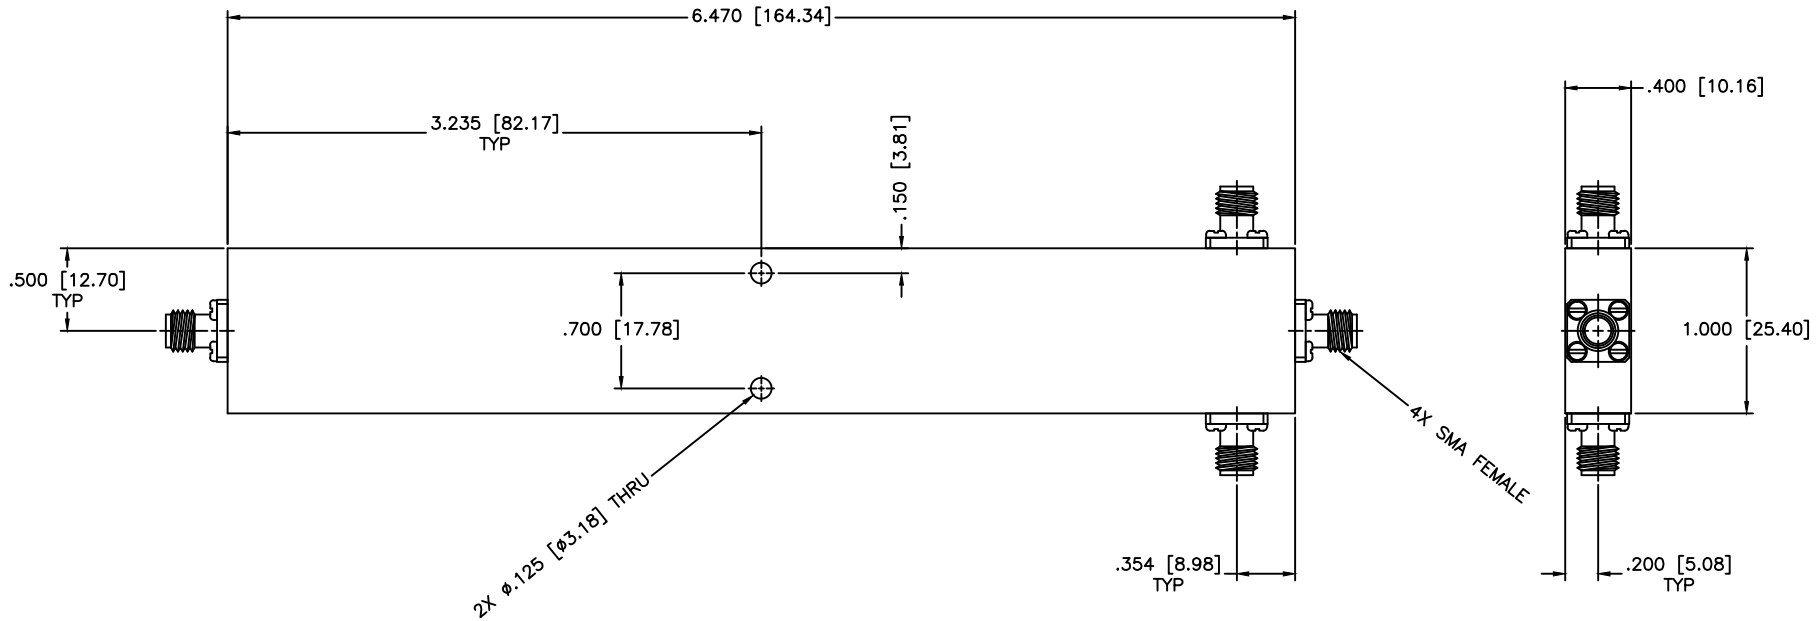

SPECIFICATIONS

- Frequency Range: 1.8–2.2 GHz
- Insertion Loss: 0.5dB Max.
- Isolation: 17dB Min.
- Amplitude Balance: ±0.3dB Max.
- Phase Balance: ±6 Deg. Max.
- VSWR In/Out: 1.40:1/1.35:1 Max.
- Power: 30W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		3-WAY POWER DIVIDER			
PART NO.:		PS3-16			
DRAWN: Paiboon Luekhamhan DATE: 06-29-1999	APPROVED: T. Nguyen DATE: 06-29-1999	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 80083

