


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

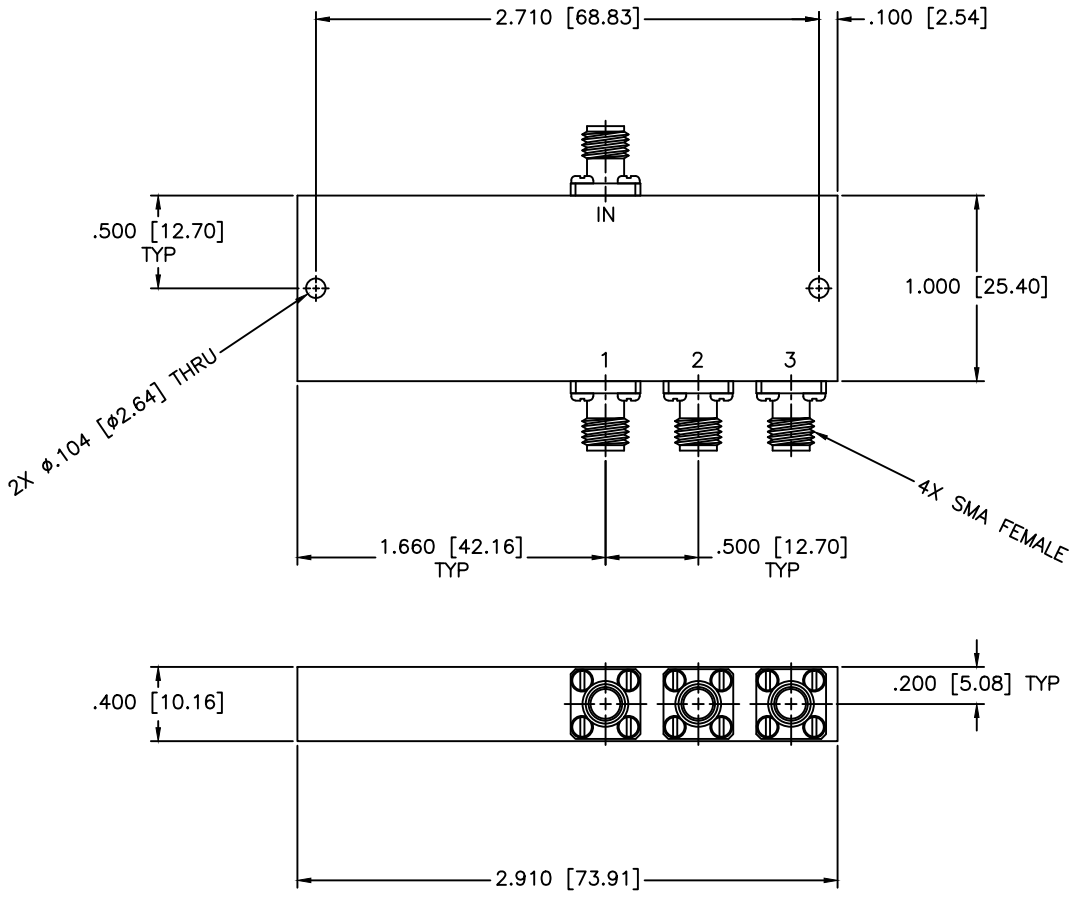

SPECIFICATIONS

Frequency Range: 2.2–2.4 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 17dB Min.
 VSWR: 1.50:1 Max.
 Phase Balance: ±5 Deg. Max.
 Amplitude Balance: 0.5dB Max.
 Power: 20 Watts (Load vswr@1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-18-2008
APPROVED: T. Nguyen	DATE: 03-18-2008

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <h3>3-WAY POWER DIVIDER</h3>
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <h2>PS3-22</h2>	
THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 82796
DO NOT SCALE THE DRAWING		