


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

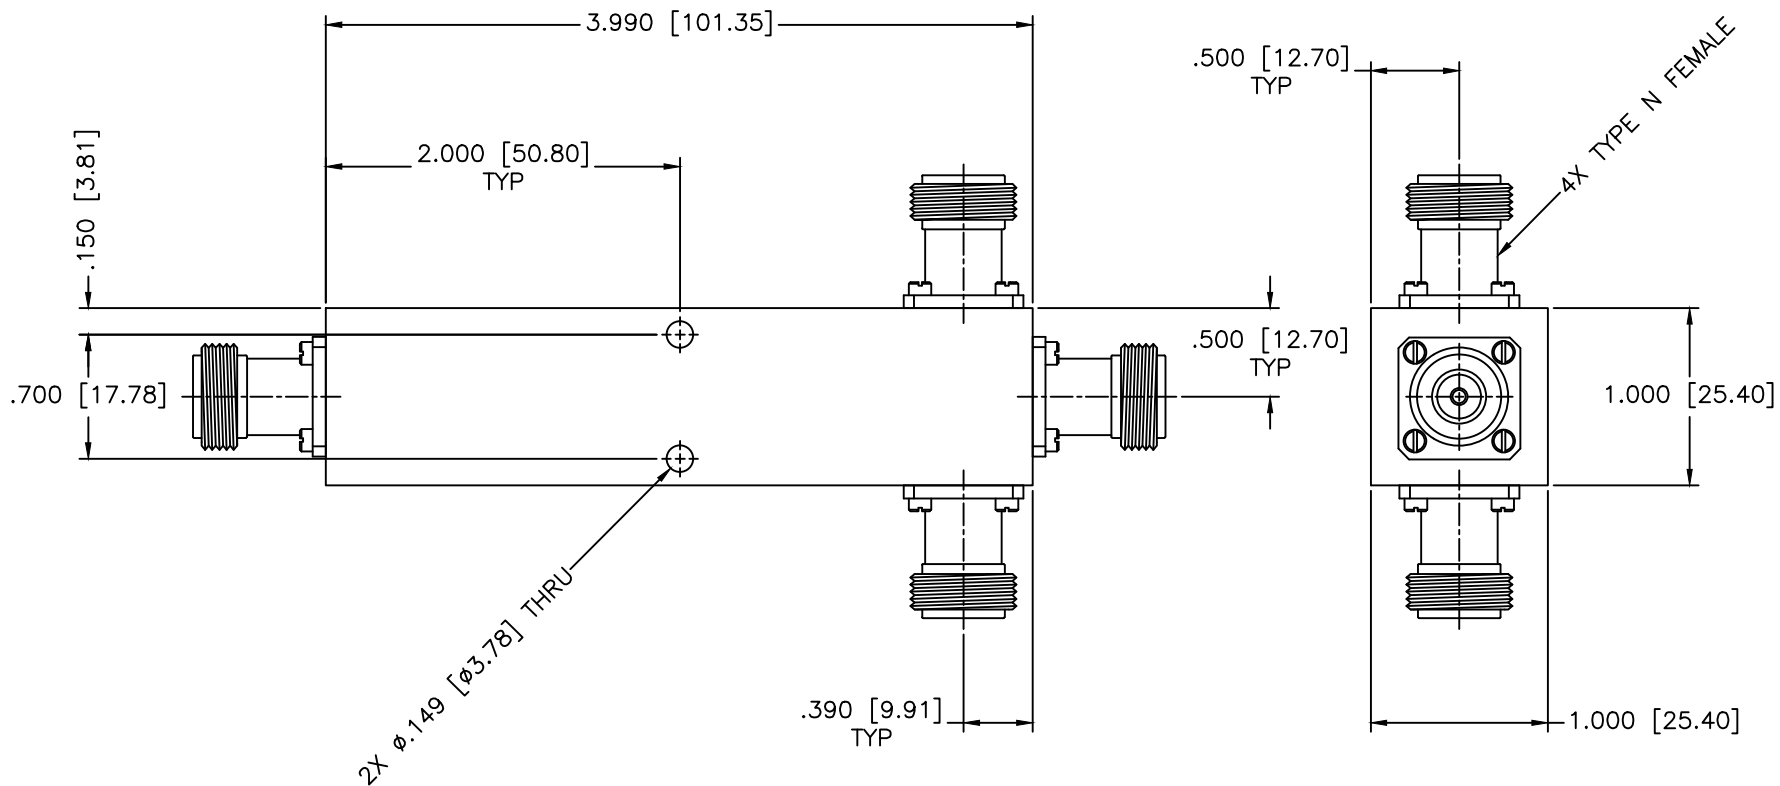

**SPECIFICATIONS**

Frequency Range: 2.2–2.4 GHz  
 Insertion Loss: 0.5dB Max.  
 Isolation: 17dB Min.  
 Phase Balance: ±5 Deg. Max.  
 Amplitude Balance: ±0.5dB Max.  
 VSWR In/Out: 1.50:1/1.50:1 Max.  
 Power: 20W (Load vswr@1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 01-31-1999
APPROVED: T. Nguyen	DATE: 01-31-1999



MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 544-6254 FAX: (727) 381-6116  
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS: ± 1/64  
 DECIMALS: ±.02 ±.008  
 ANGLE: ±1/2°

DRAWING TITLE: 3-WAY POWER DIVIDER			
PART NO. PS3-22/NFT			
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG. NO. 86948
DO NOT SCALE THE DRAWING			

THIRD ANGLE PROJECTION