


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

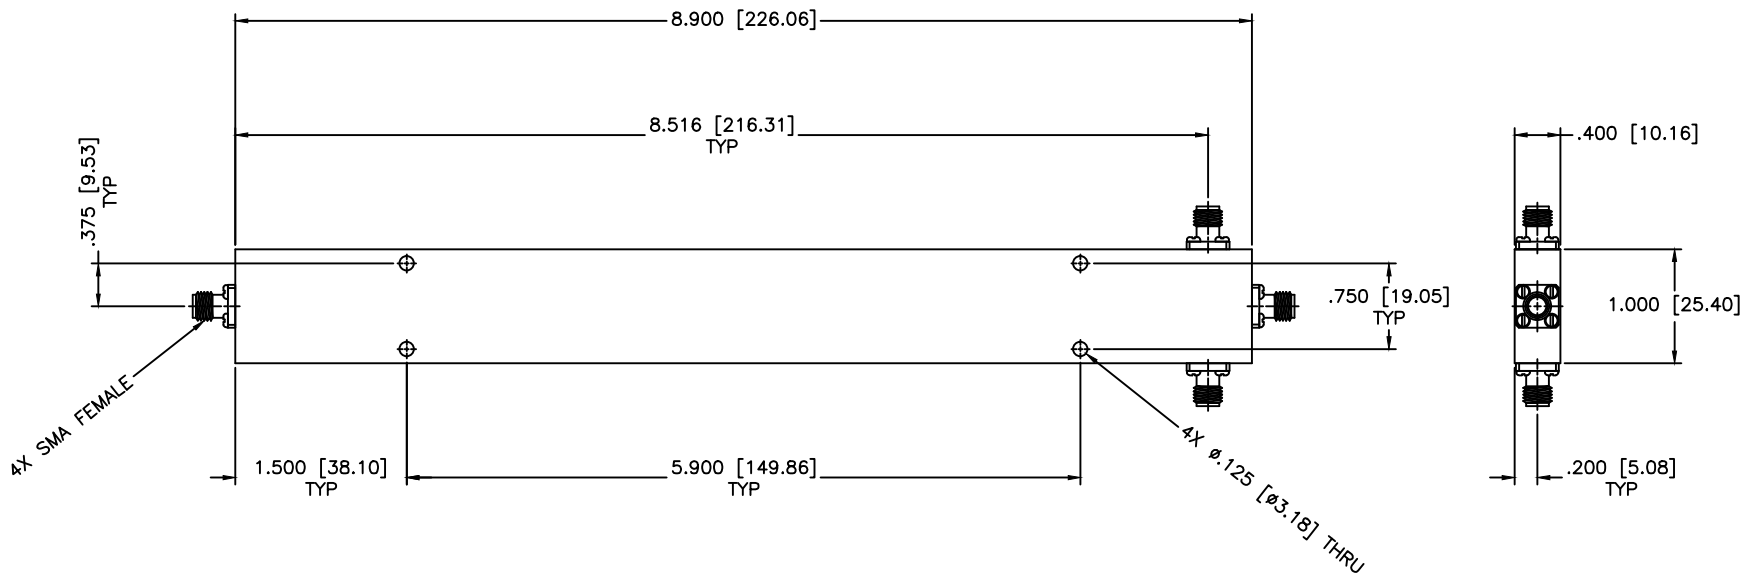

SPECIFICATIONS

Frequency Range: 0.3–2.2 GHz
 Insertion Loss: 0.8dB Max.
 Isolation: 16dB Min.
 VSWR In/Out: 1.50:1/1.40:1 Max.
 Phase Balance: ±4 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Input Power: 30 Watts (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		3-WAY POWER DIVIDER			
PART NO.:		PS3-25			
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	DWG NO.:
Paiboon Luekhamhan	10-17-1997			0D2L5	80078
APPROVED:	DATE:			SIZE: N/A	REV: N/A
T. Nguyen	10-17-1997			DO NOT SCALE THE DRAWING	