


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

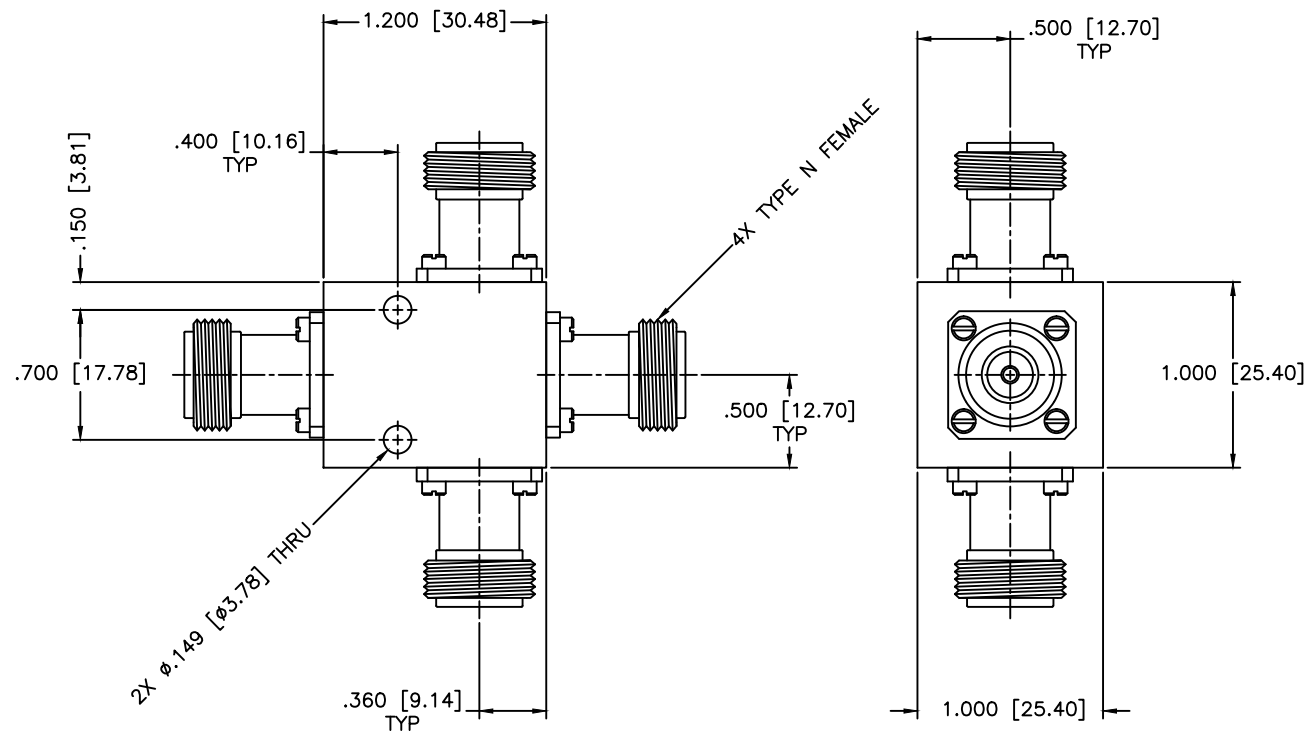

SPECIFICATIONS

Frequency Range: 14–14.5 GHz
 Insertion Loss: 1.9dB Max.
 Isolation: 12dB Min.
 VSWR Input/Output: 1.75:1/1.65:1 Max.
 Amplitude Balance: 0.7dB Max.
 Power: 10W (Load vswr@1.2)

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$
DRAWN: Paiboon Luekhamhan DATE: 10-21-1997		DRAWING TITLE: 3-WAY POWER DIVIDER		
APPROVED: T. Nguyen DATE: 10-21-1997		PART NO. PS3-26/NF		
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 80113