


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

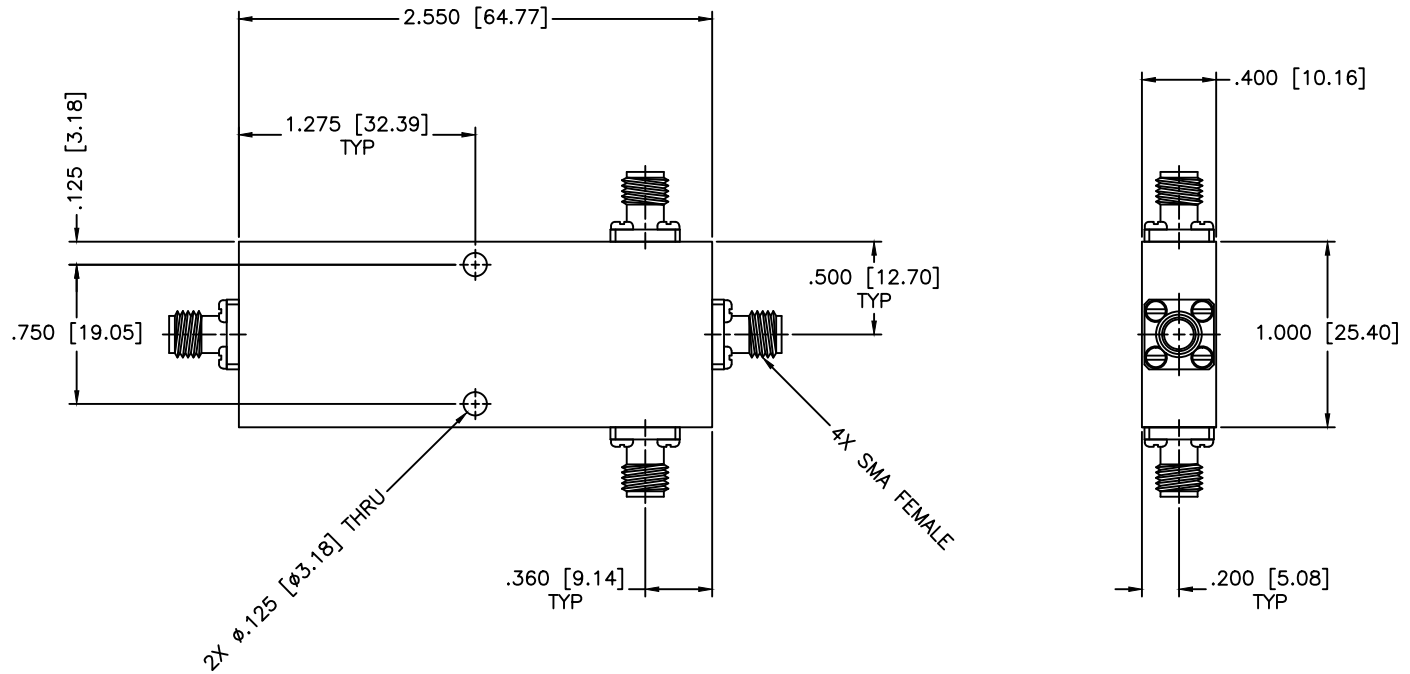

SPECIFICATIONS

Frequency Range: 2–6 GHz
 Insertion Loss: 0.7dB Max.
 Isolation: 17dB Min.
 VSWR Input/Output: 1.50:1/1.50:1 Max.
 Phase Balance: ±14 Deg. Max.
 Amplitude Balance: 0.7dB Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		3-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan	DATE: 01-31-1999	THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED: T. Nguyen	DATE: 01-31-1999		OD2L5	A	N/A	80085
			DO NOT SCALE THE DRAWING			