


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

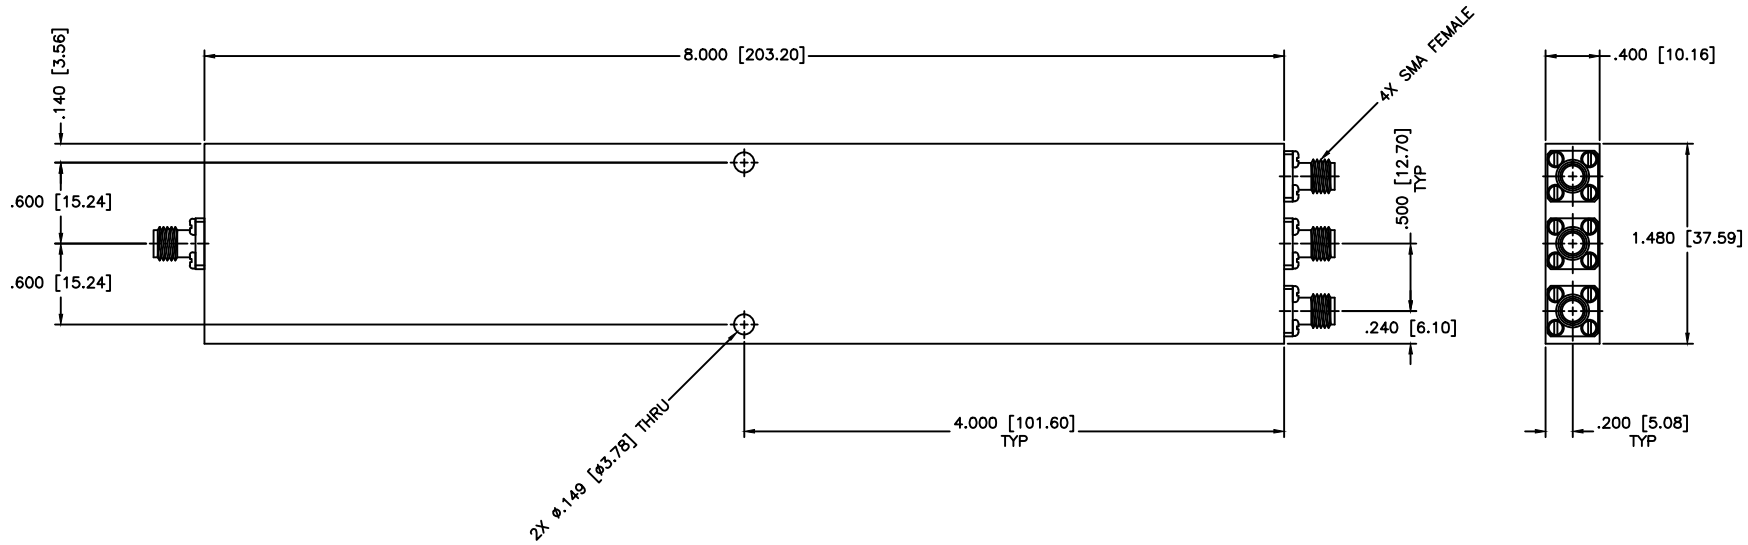

SPECIFICATIONS

Frequency Range: 0.5–8 GHz
 Insertion Loss: 2.6dB Max.
 Isolation: 15dB Min.
 VSWR Input/Output: 1.60:1/1.60:1 Max.
 Phase Balance: ±14 Deg. Max.
 Amplitude Balance: 0.5dB Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 3-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 11-10-2014		PART NO. PS3-34	
APPROVED: T. Nguyen		DATE: 11-10-2014		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 86077
				DO NOT SCALE THE DRAWING	