
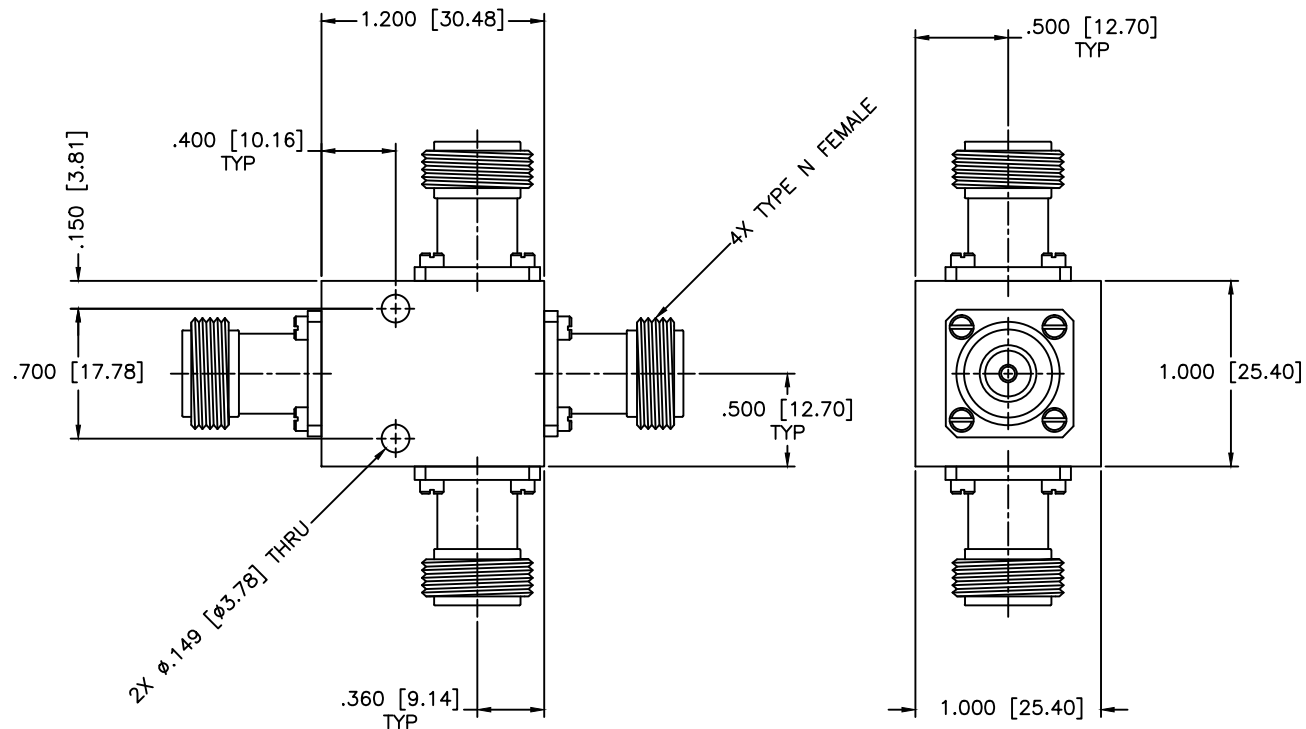


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 10.9–12.75 GHz
 Insertion Loss: 1.25dB Max.
 Isolation: 16dB Min.
 VSWR: 1.65:1 Max.
 Phase Balance: ± 10 Deg. Max.
 Amplitude Balance: ± 0.6 dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 3-WAY POWER DIVIDER	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS3-60/NF	
		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5 SIZE: A DO NOT SCALE THE DRAWING REV: N/A DWG NO. 86922	
DRAWN: Paiboon Luekhamhan DATE: 10-21-1997					
APPROVED: T. Nguyen DATE: 10-21-1997					