


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

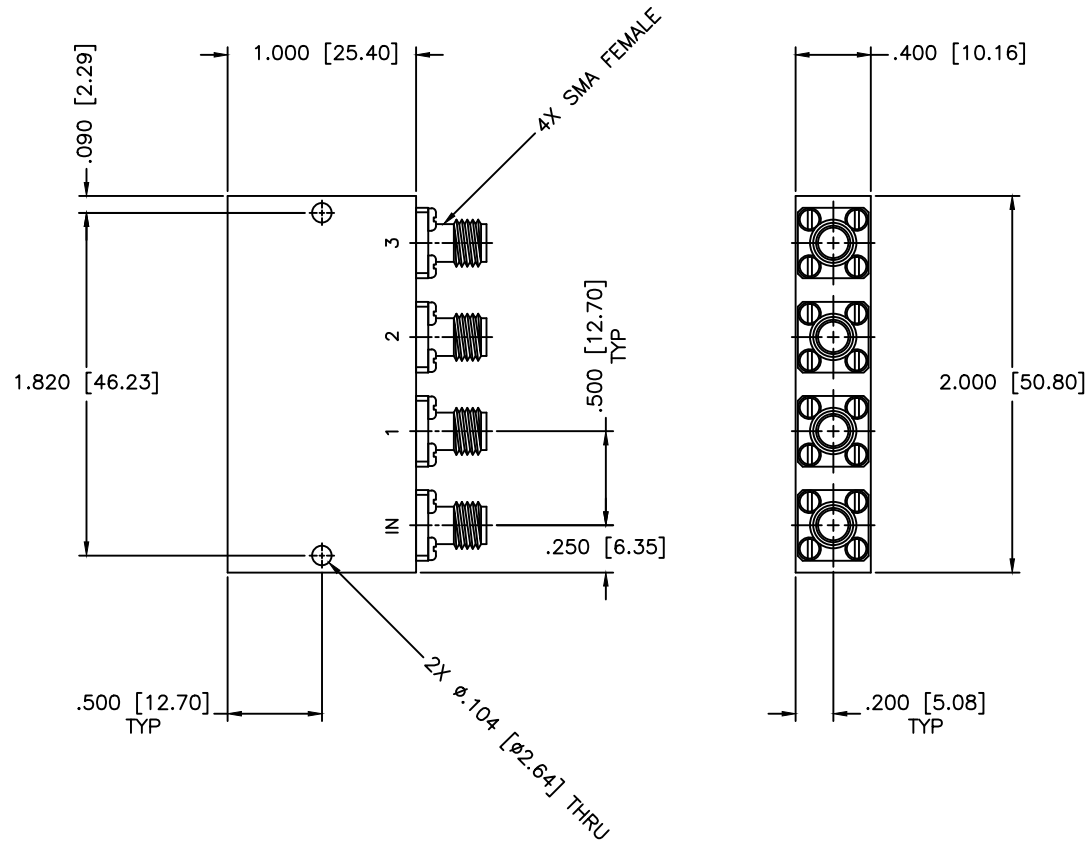

**SPECIFICATIONS**

Frequency Range: .869-.894 GHz  
 Insertion Loss: 0.6dB Max.  
 Isolation: 17dB Min.  
 VSWR Input/Output: 1.35:1/1.30:1 Max.  
 Phase Balance: ±6 Deg. Max.  
 Amplitude Balance: ±0.5dB Max.  
 Power: 20 Watts (Load vswr@1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 361-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>3-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS3-71</b>		
DATE: 12-16-1999		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 12-16-1999		SIZE: A
		REV: N/A		DWG NO. 81489
		DO NOT SCALE THE DRAWING		