


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

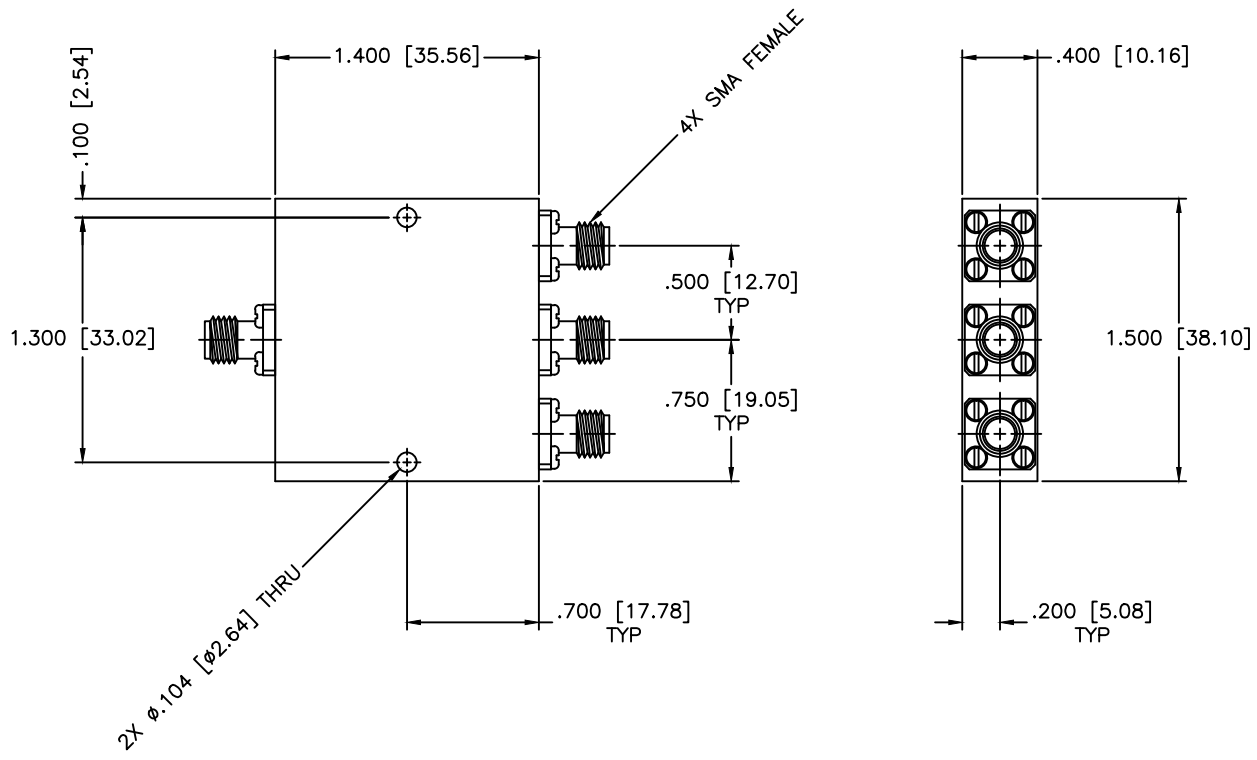

**SPECIFICATIONS**

Frequency Range: 10–20 GHz  
 Insertion Loss: 1.5dB Max.  
 Isolation: 16dB Min.  
 VSWR: 1.60:1 Max.  
 Phase Balance: ±10 Deg. Max.  
 Amplitude Balance: ±0.6dB Max.  
 Power: 10W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 361-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		3-WAY POWER DIVIDER	
DRAWN:		DATE:		PART NO.		PS3-78	
APPROVED:		DATE:		CAGE CODE:		SIZE:	REV:
Paiboon Luekhamhan		08-30-2002		OD2L5		A	N/A
T. Nguyen		08-30-2002		DO NOT SCALE THE DRAWING		DWG NO. 85029	