


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

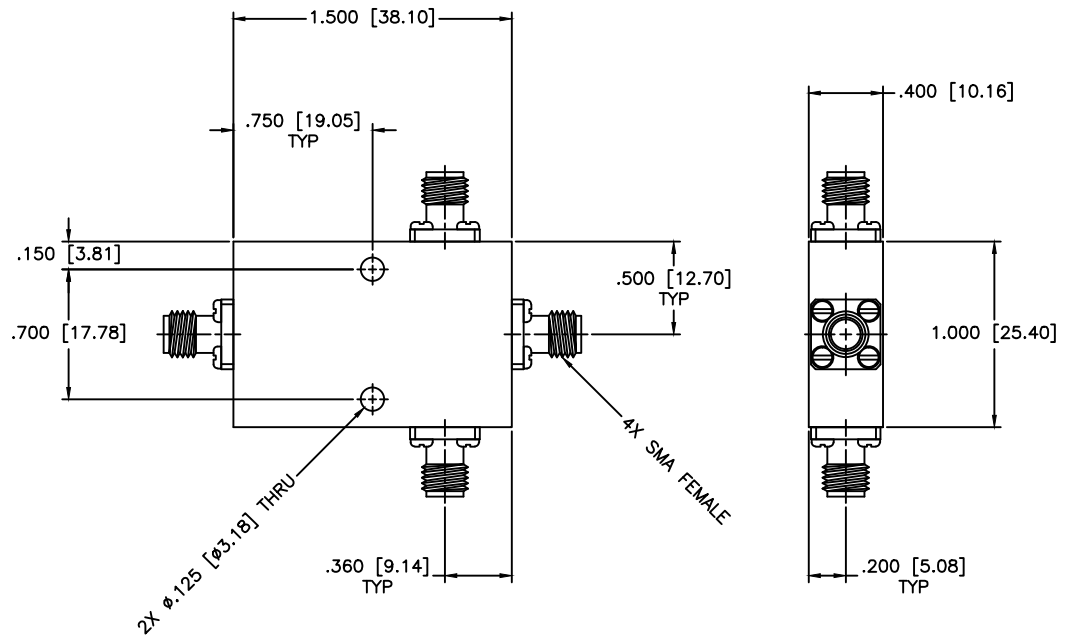

SPECIFICATIONS

Frequency Range: 9–11 GHz
 Insertion Loss: 0.9dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 VSWR IN/OUT: 1.70:1/1.60:1 Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		3-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		PS3-92
Paiboon Luekhamhan		10-28-2008				
APPROVED:		DATE:		CAGE CODE:	SIZE:	REV:
T. Nguyen		10-28-2008		OD2L5	A	N/A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		DWG NO.
						83981