REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

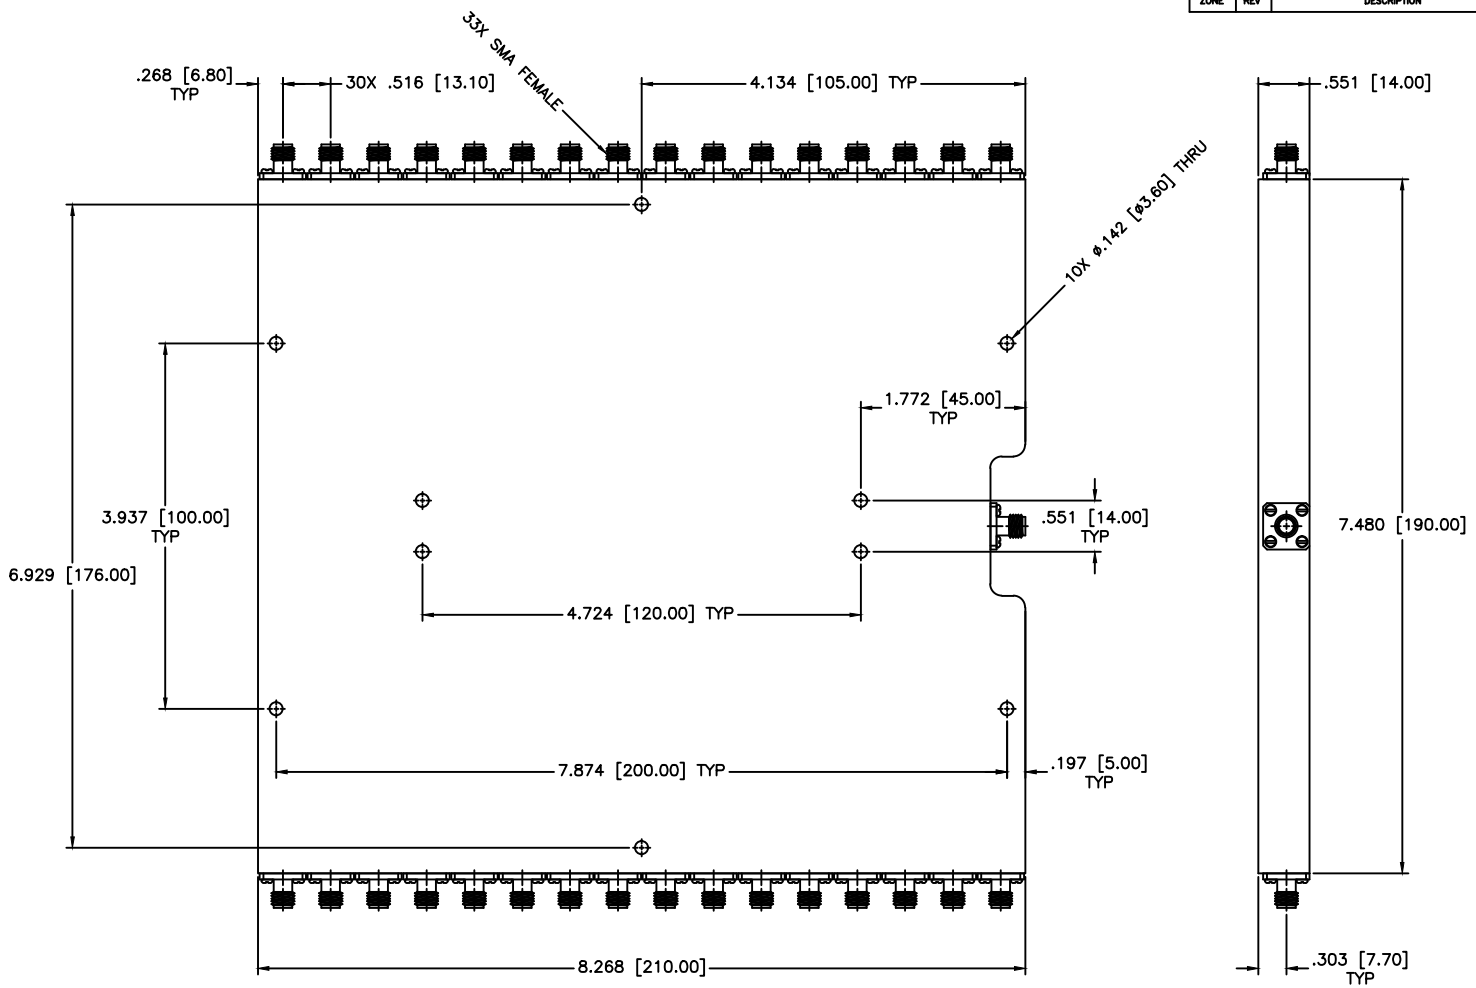

SPECIFICATIONS

Frequency Range:	2–8 GHz
Insertion Loss:	4.0dB Max.
Isolation:	16dB Min.
CW Power:	20W Max. Peak 3kW
VSWR:	1.50:1 Max.
Amplitude Balance:	±0.5dB Max.
Phase Balance:	±6Deg. Max.

MATERIAL:

DRAWN: Paiboon Luekhamhan DATE: 01-09-2018

APPROVED: T. Nguyen DATE: 01-09-2018

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.02 ±.009
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A

SHEET: N/A

DRAWING TITLE: 32-WAY POWER DIVIDER

PART NO. PS32-7-T

CAGE CODE: 0D2L5

SIZE: C REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 86711