


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

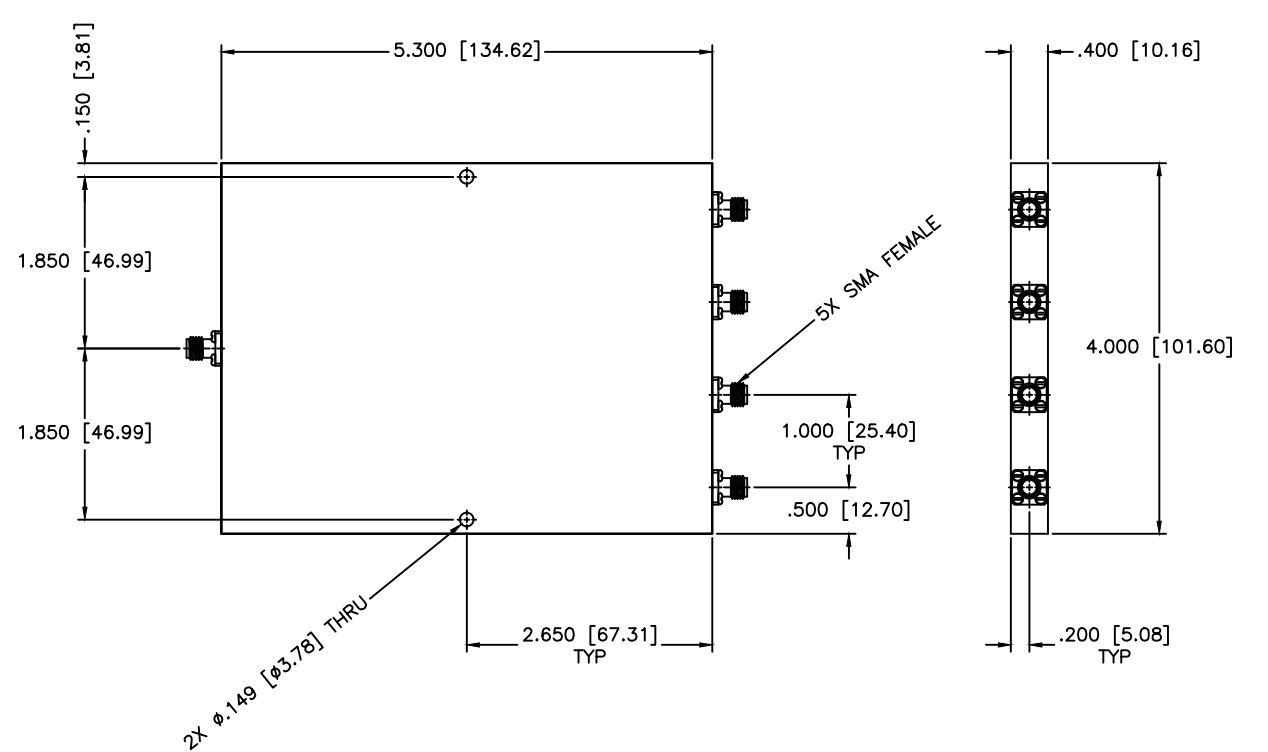

SPECIFICATIONS

Frequency Range: 0.8–3.0 GHz
 Insertion Loss: 1.5dB Min.
 Isolation: 18dB Min.
 VSWR: 1.40:1 Max.
 Amplitude Balance: ±0.25 dB Max.
 Phase Balance: ±6 Deg. Max.
 Power: 30W (Load vswr @1.2)

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:	4-WAY POWER DIVIDER	
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	SHEET:	N/A	
DATE:			PART NO. PS4-105		
APPROVED:		THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5		
DATE:			SIZE: C	REV: A	DWG NO. 82338
DO NOT SCALE THE DRAWING					