


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

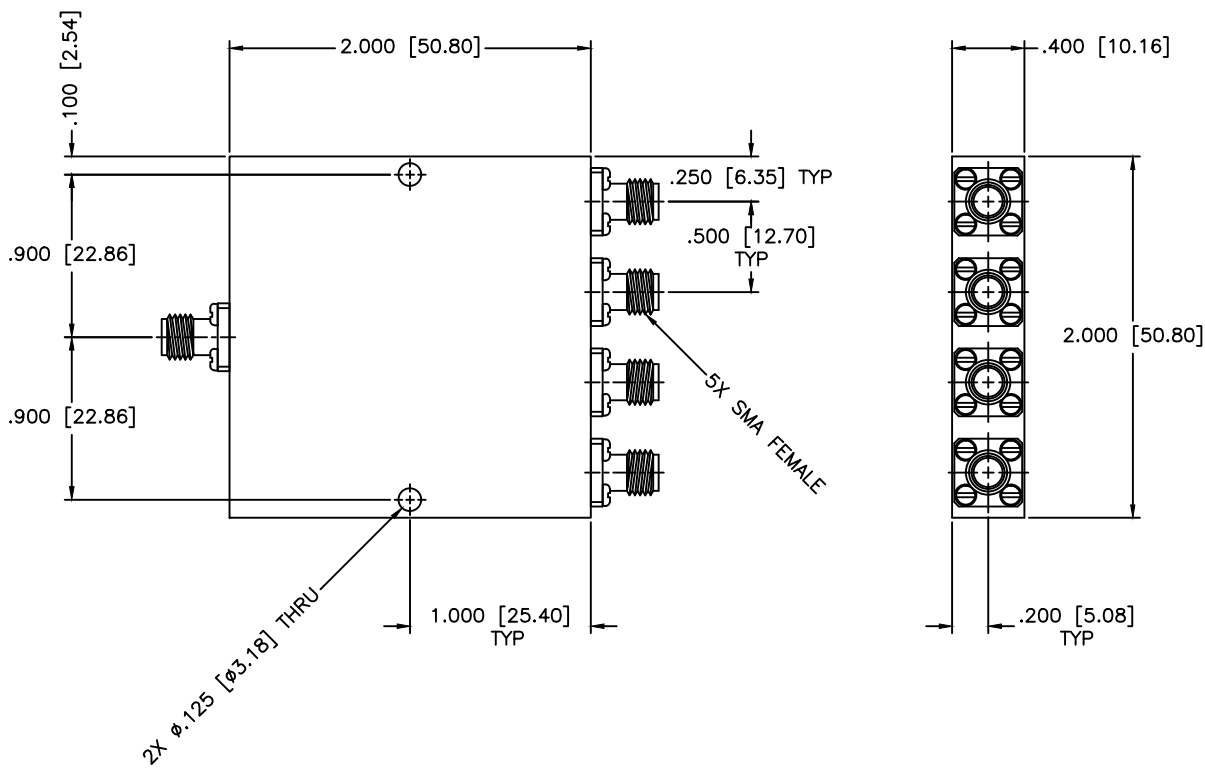

**SPECIFICATIONS**

Frequency Range: 17–22 GHz  
 Insertion Loss: 1.9dB Max.  
 Isolation: 16dB Min.  
 VSWR In/Out: 1.50:1/1.45:1 Max.  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±4 Deg Max.  
 Power: 30W (vswr @1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.MCLI.COM">http://www.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS4-108</b>		
DATE: 05-18-1998	DATE: 05-18-1998	CAGE CODE: <b>OD2L5</b>	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 05-18-1998	DO NOT SCALE THE DRAWING		DWG NO. <b>81038</b>

PROPRIETARY NOTICES:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION