


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

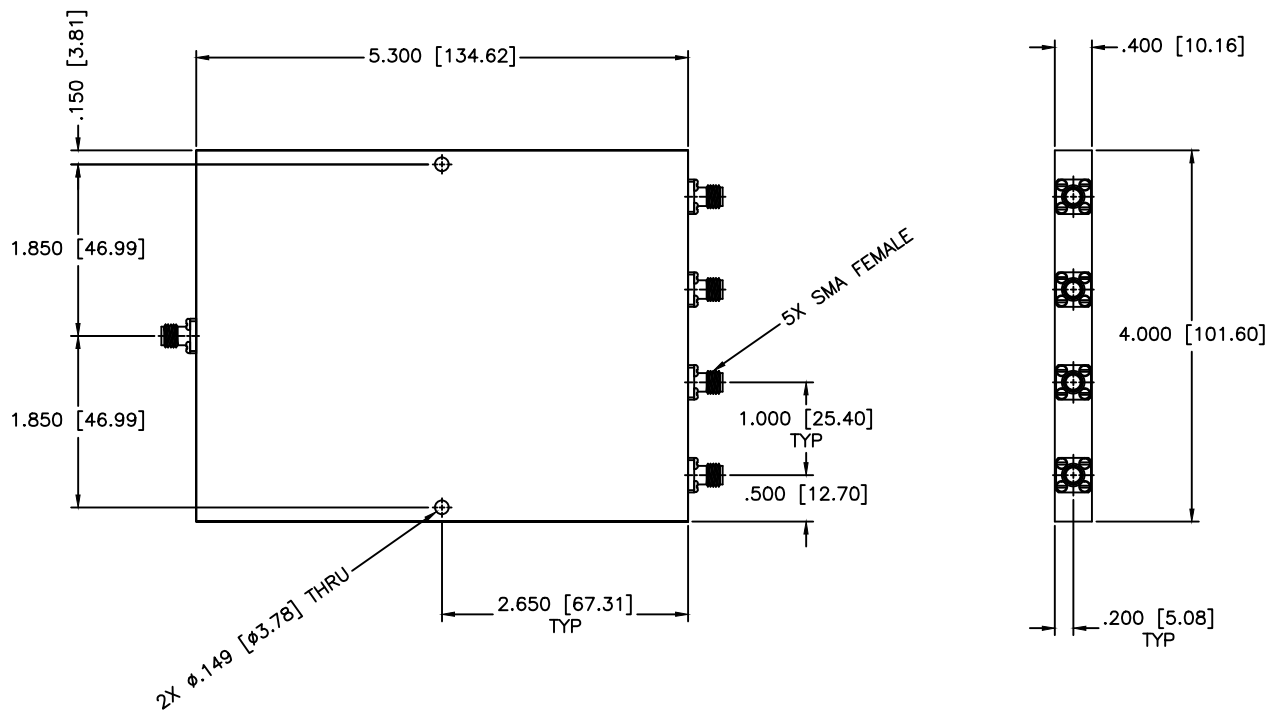

**SPECIFICATIONS**

- Frequency Range: 0.3–3 GHz
- Insertion Loss: 1.5dB Max.
- Isolation: 19dB Min.
- VSWR: 1.40:1Max.
- Amplitude Balance: ±0.5dB Max.
- Phase Balance: ±10 Deg. Max.
- Power: 10W (Load VSWR @1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>		SHEET: N/A
DRAWN: Paiboon Luethamhan		DATE: 07-21-1999		PART NO.: PS4-109	
APPROVED: T. Nguyen		DATE: 07-21-1999		CAGE CODE: OD2L5	SIZE: C
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		REV: N/A	DWG NO.: 81353
DO NOT SCALE THE DRAWING					