


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

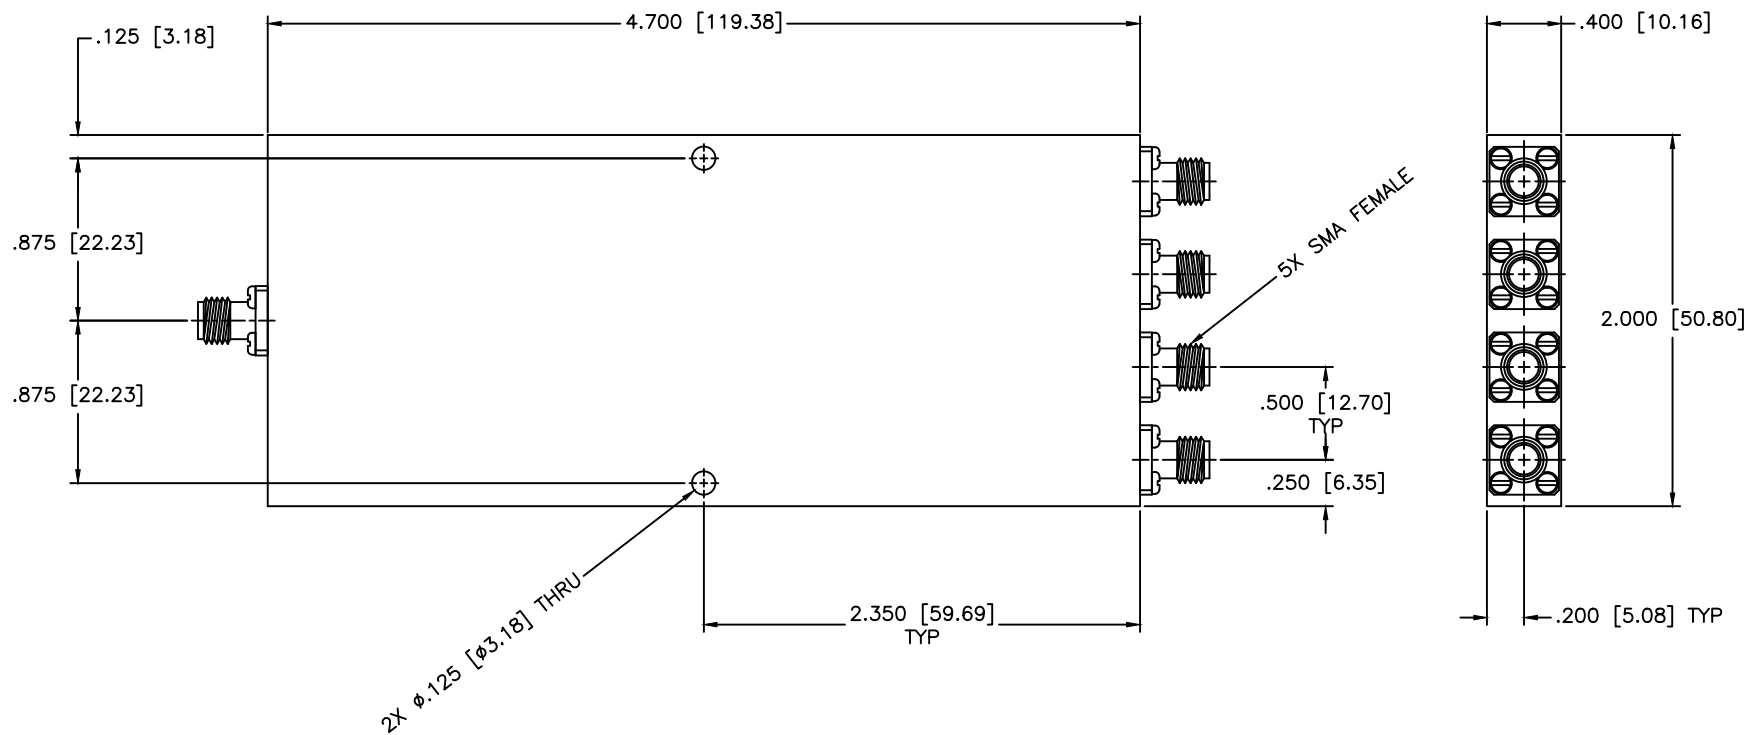

SPECIFICATIONS

Frequency Range: 2-18 GHz
 Insertion Loss: 2.3dB Max.
 Isolation: 16.5dB Min.
 VSWR Input/Output: 1.50:1/1.40:1 Max.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: 0.8dB Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 4-WAY POWER DIVIDER	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PS4-11	
DRAWN: Paiboon Luekhamhan	DATE: 06-29-1999	THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE: A
APPROVED: T. Nguyen	DATE: 06-29-1999		OD2L5	REV: N/A
			DWG NO. 81136	
			DO NOT SCALE THE DRAWING	