


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

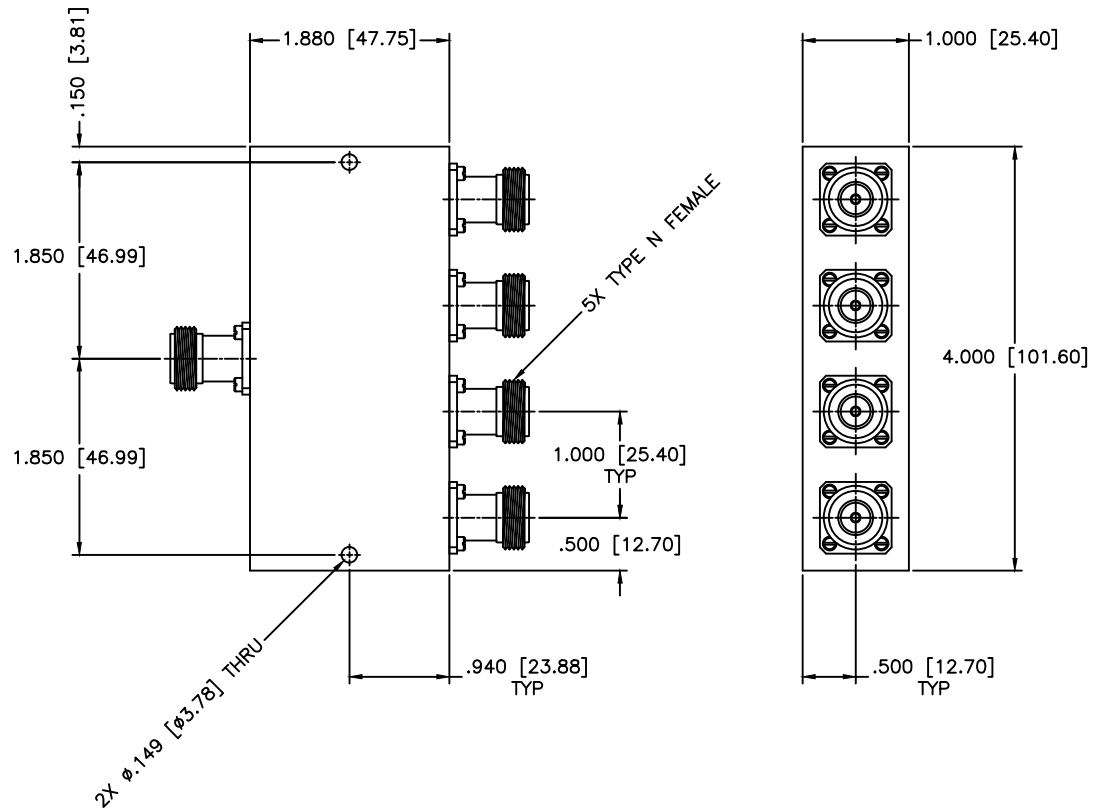

SPECIFICATIONS

Frequency Range: 12–13 GHz
 Insertion Loss: 2.2dB Max.
 Isolation: 13dB Min.
 VSWR: 1.70:1 Max.
 Power: 30W CW
 Amplitude Balance: ± 0.7 dB Max.
 Phase Balance: ± 10 Deg. Max.

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWING: Paiboon Luengkhamhan		PART NO.: PS4-113/NF		
DATE: 02-25-1998		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 02-25-1998		SIZE: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV: N/A		DWG NO.: 81314
 THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		