


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

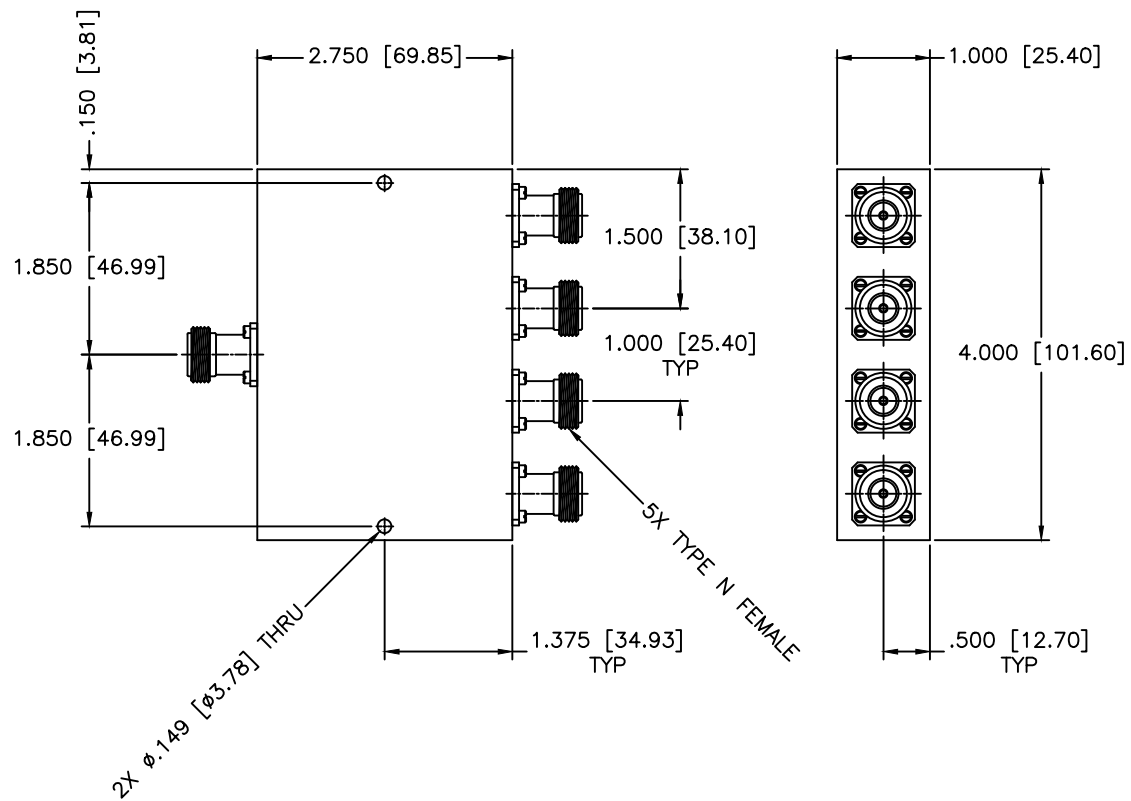

SPECIFICATIONS

Frequency Range: 1.7–1.9 GHz
 Insertion Loss: 1.0dB Max.
 Isolation: 17dB Min.
 VSWR Input/Output: 1.55:1/1.45:1 Max.
 Phase Balance: ±6 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon Luengkhamhan		DATE: 03-02-1998		PART NO.: PS4-115/NF	
APPROVED: T. Nguyen		DATE: 03-02-1998		CAGE CODE: OD2L5	
THIRD ANGLE PROJECTION		SIZE: C		REV: N/A	
				DWG NO.: 80967	
				DO NOT SCALE THE DRAWING	