


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

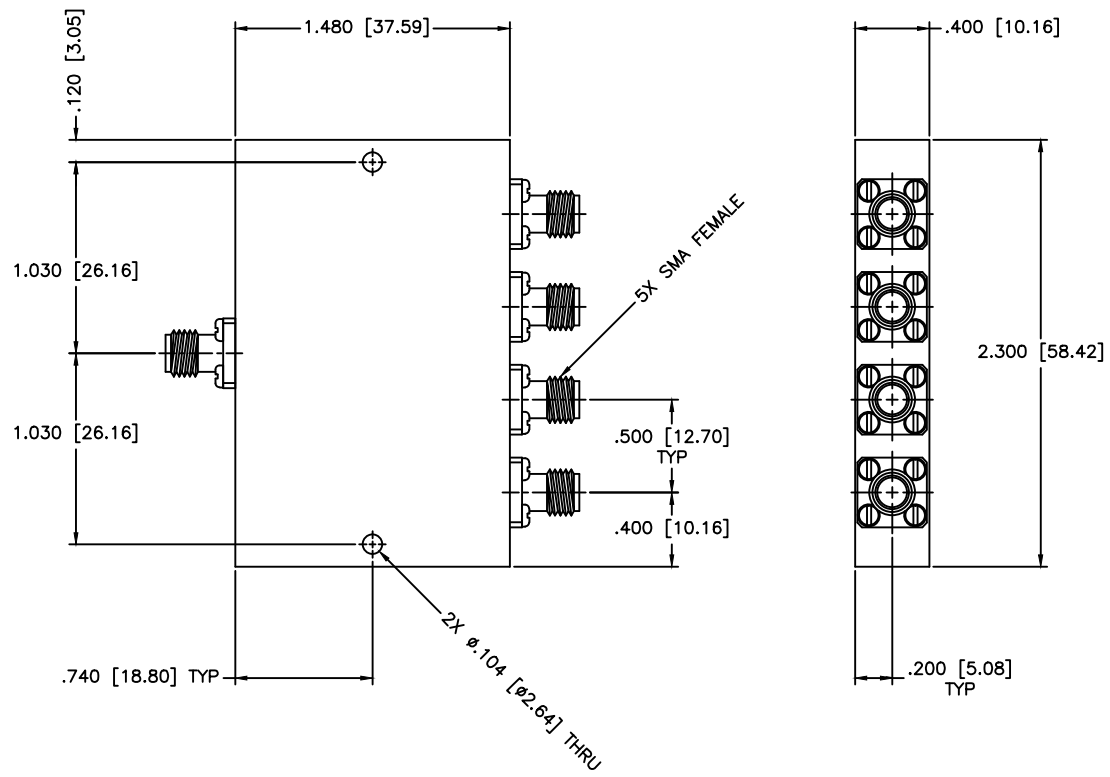

SPECIFICATIONS

- Frequency Range: 800–9600 MHz
- Insertion Loss: 1.0dB Max.
- Isolation: 28dB Min.
- VSWR Input/Output: 1.50:1/1.40:1 Max.
- Amplitude Balance: ± 0.3 dB Max.
- Phase Balance: ± 5 Deg. Max.
- Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A	
		DRAWING TITLE: 4-WAY POWER DIVIDER				
		PART NO. PS4-131				
DRAWN: Paiboon Luekhamhan	DATE: 06-21-1999	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 81323
APPROVED: T. Nguyen	DATE: 06-21-1999		THIRD ANGLE PROJECTION 	DO NOT SCALE THE DRAWING		