


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

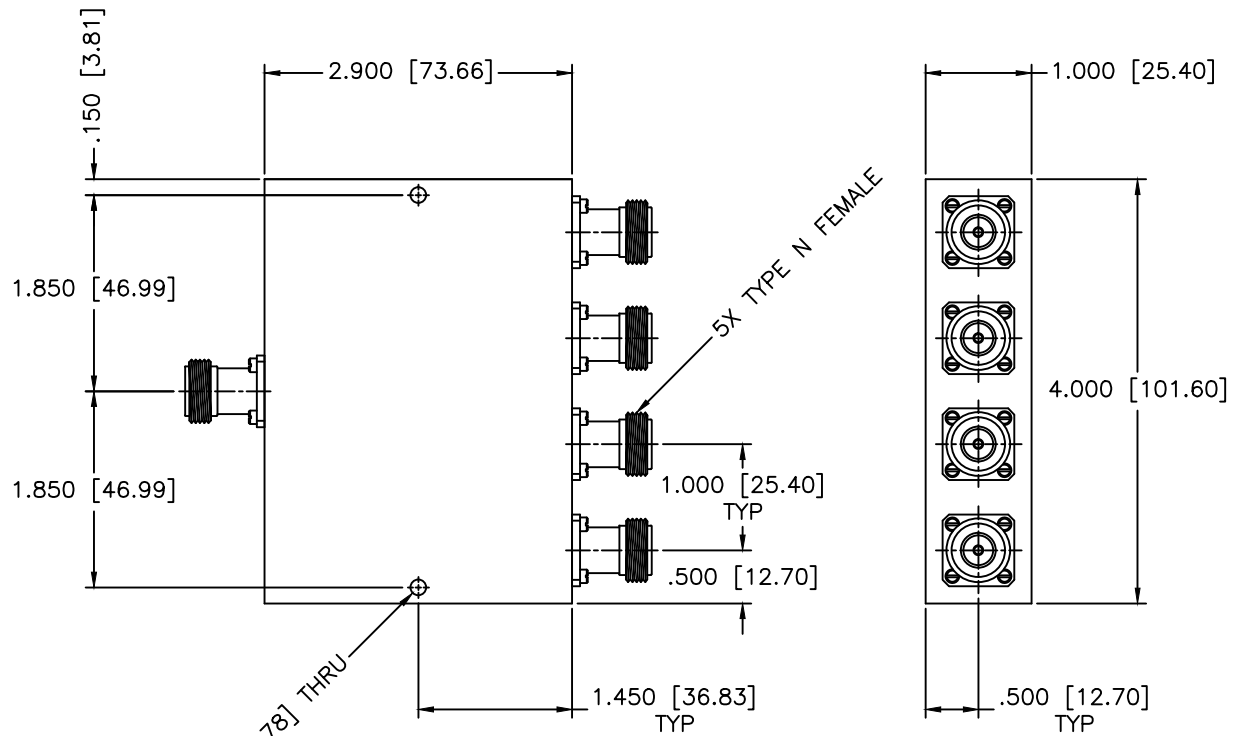

SPECIFICATIONS

Frequency Range: 0.8–0.96 GHz
 Insertion Loss: 0.9dB Max.
 Isolation: 18dB Min.
 VSWR In/Out: 1.45:1/1.30:1 Max.
 Power: 30W CW
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±10 Deg. Max.

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWN: Paiboon Luexhamhan		PART NO. PS4-131/NF		
DATE: 06-24-1999	DATE: 06-24-1999	CAGE CODE: OD2L5		
APPROVED: T. Nguyen		SIZE: C	REV: N/A	DWG NO. 81324
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		