


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

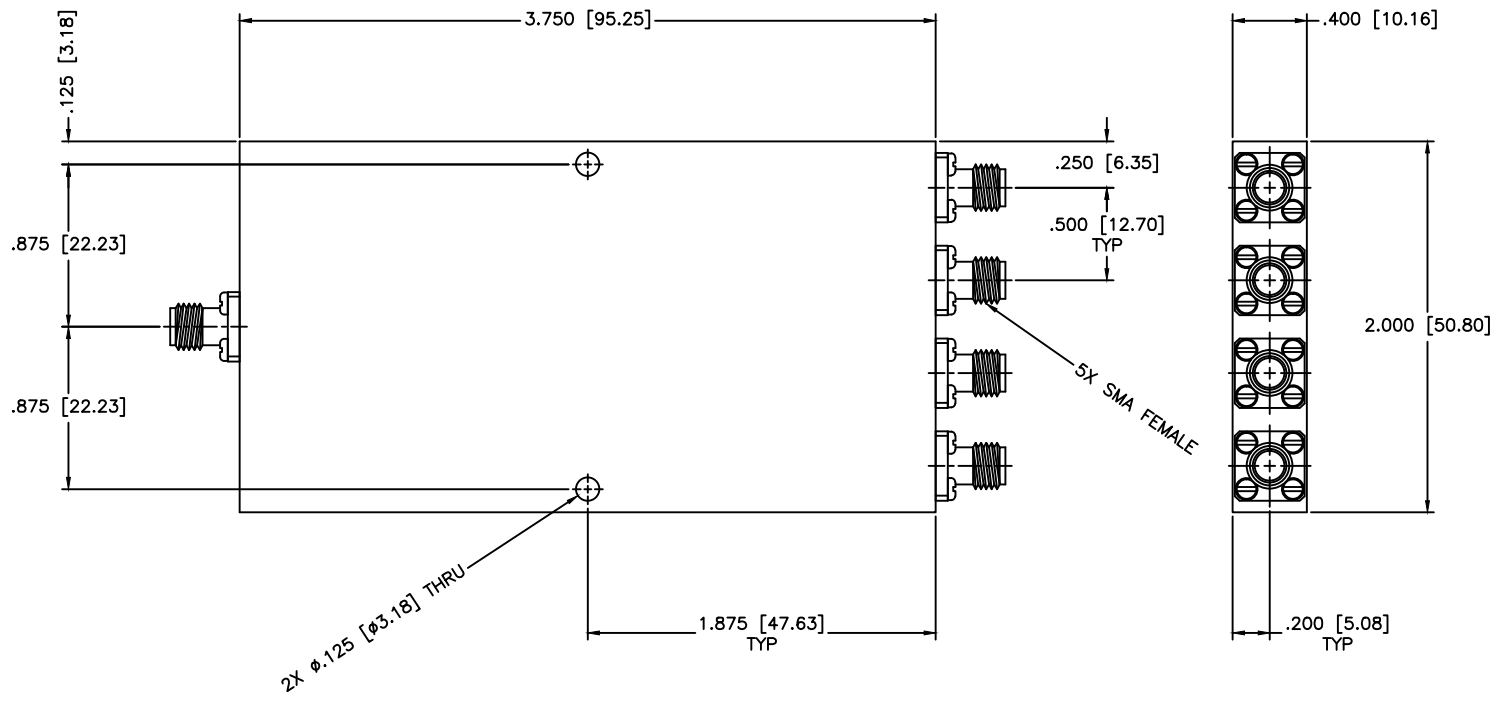

**SPECIFICATIONS**

Frequency Range: 2–20 GHz  
 Insertion Loss: 2.3dB Max.  
 Isolation: 14dB Min.  
 VSWR: 1.80:1 Max.  
 Amplitude Balance: ±0.6dB Max.  
 Phase Balance: ±8 Deg. Max.  
 Power: 2 Watts (vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWN:		PART NO.		4-WAY POWER DIVIDER		
DATE:		CAGE CODE:		PS4-137		
APPROVED:		SIZE:		REV:		DWG NO.
T. Nguyen		A		N/A		80847
DATE:		DO NOT SCALE THE DRAWING		THIRD ANGLE PROJECTION		
02-09-1998		OD2L5				