| REVISIONS | | | | |
|---|---|---|---|---|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |

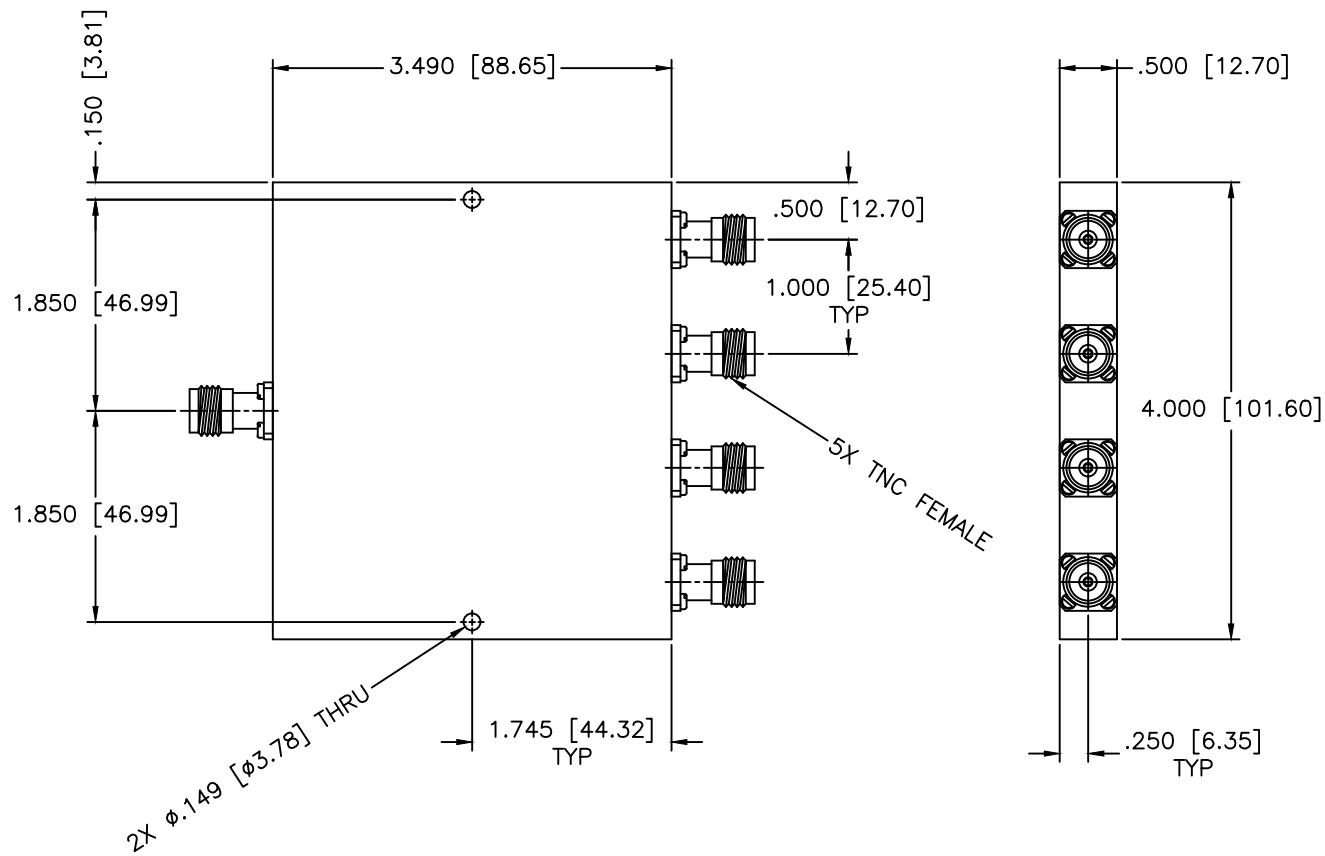


SPECIFICATIONS

Frequency Range: 0.8–2.5 GHz
Insertion Loss: 1.3dB Max.
Isolation: 17dB Min.
VSWR In/Out: 1.40:1/1.25:1 Max.
Power: 30W CW
Amplitude Balance: ±0.3dB Max.
Phase Balance: ±4 Deg. Max.

MATERIAL:

DRAWN. Paiboon Luekhamhan DATE: 02-11-2008

APPROVED: T. Nguyen DATE: 02-11-2008

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A
SHEET: N/A

DRAWING TITLE: 4-WAY POWER DIVIDER

PART NO. PS4-142/TNC

CAGE CODE: 0D2L5
SIZE: C
REV: N/A
DO NOT SCALE THE DRAWING
DWG NO. 83055