


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

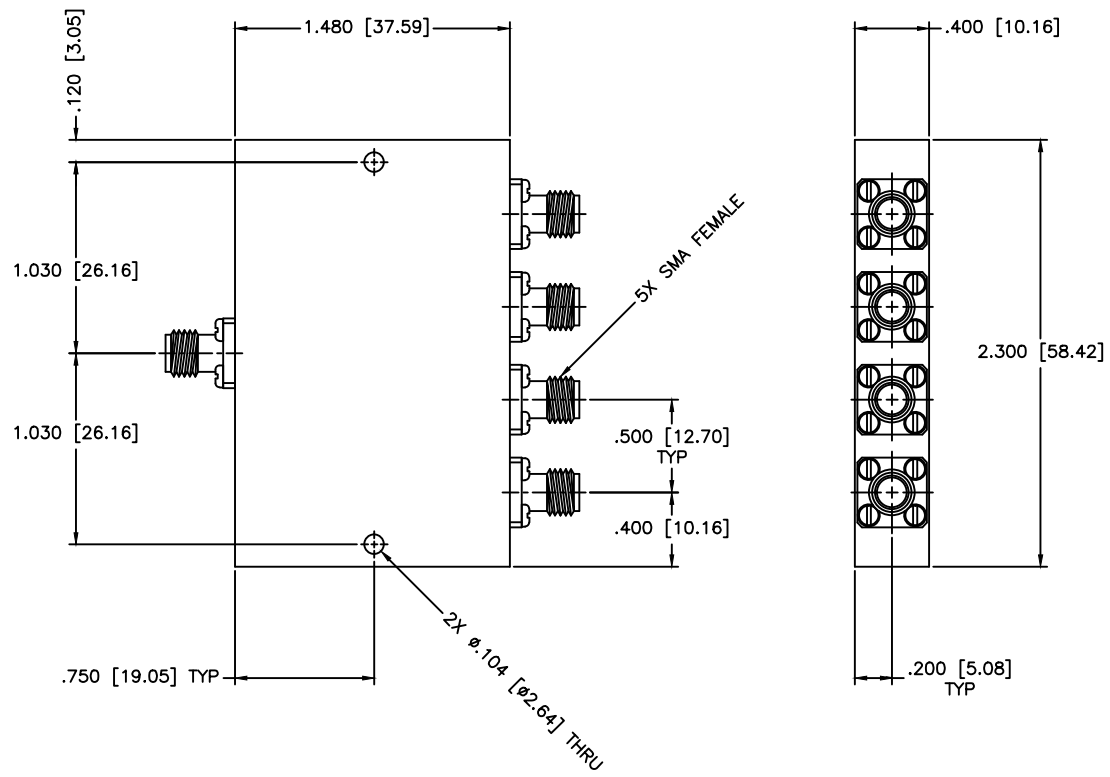

SPECIFICATIONS

Frequency Range: 950–2050 MHz
 Insertion Loss: 0.8dB Max.
 Isolation: 19dB Min.
 VSWR Input/Output: 1.50:1/1.40:1 Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±5 Deg. Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		PS4-145
Paiboon Luekhamhan		06-29-1999		CAGE CODE:		
APPROVED:		DATE:		SIZE:		81174
T. Nguyen		06-29-1999		A		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV:		N/A
		THIRD ANGLE PROJECTION 		DWG NO.		
				OD2L5		DO NOT SCALE THE DRAWING