



REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

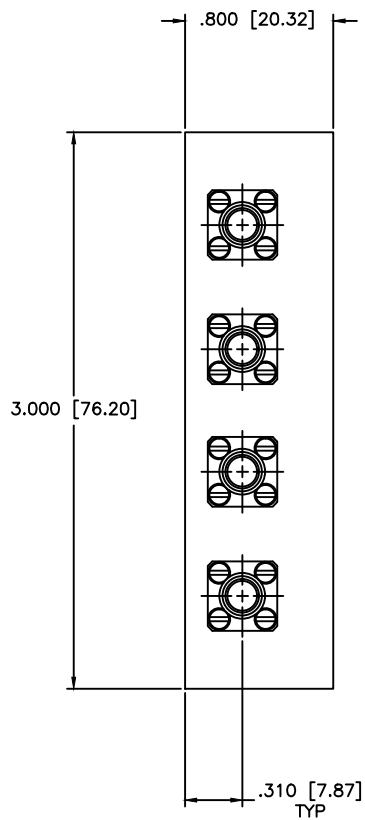

4X 2-56 X .300 DEEP FAR SIDE

5X SMA FEMALE

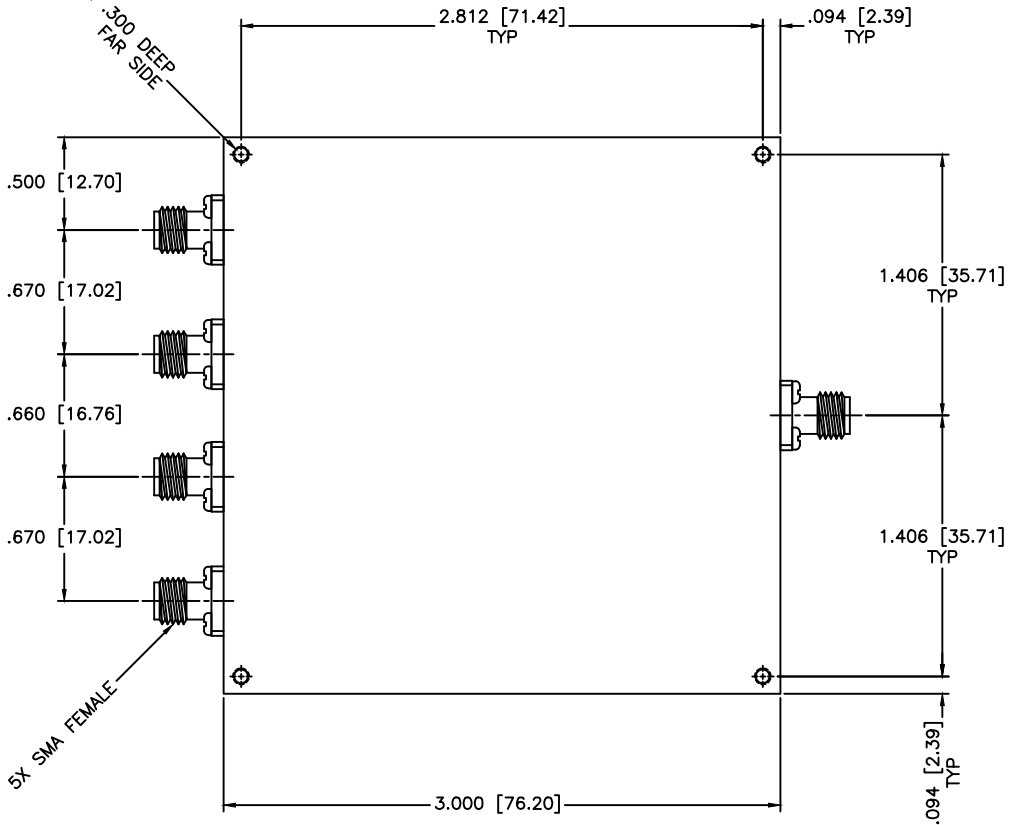

SPECIFICATIONS

Frequency Range: 100–500 MHz
 Insertion Loss: 0.65dB Max.
 Isolation: 20dB Min.
 VSWR: 1.30:1Max.
 Amplitude Balance: ±0.25dB Max.
 Phase Balance: ±5 Deg. Max.
 Power: 25W CW

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.015 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE:		4-WAY POWER DIVIDER			
PART NO.:		PS4-146-25			
DRAWN: Paiboon Luekhamhan	DATE: 03-07-2008	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE: A REV: N/A DWG NO.
APPROVED: T. Nguyen	DATE: 03-07-2008	THIRD ANGLE PROJECTION 		OD2L5	DO NOT SCALE THE DRAWING 83074