


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

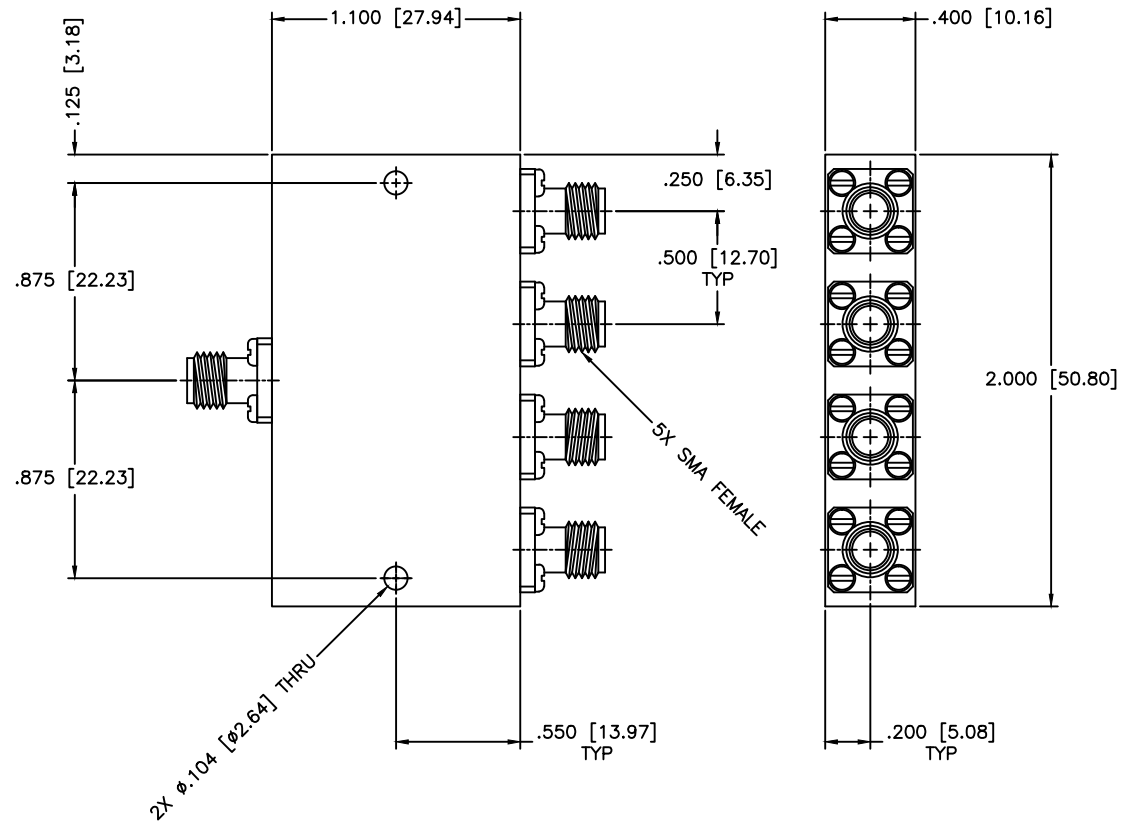

**SPECIFICATIONS**

Frequency Range: 27–30 GHz  
 Insertion Loss: 2.1dB Min.  
 Isolation: 10dB Min.  
 VSWR In/Out: 2.32:1/1.72:1 Max.  
 Amplitude Balance: ±0.8dB Max.  
 Phase Balance: ±10 Deg. Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		PART NO.: PS4-150	
DATE: 06-15-1998		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 06-15-1998	
THIRD ANGLE PROJECTION		SIZE: N/A	
		REV: N/A	
		DWG NO.: 83920	
DO NOT SCALE THE DRAWING			