


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

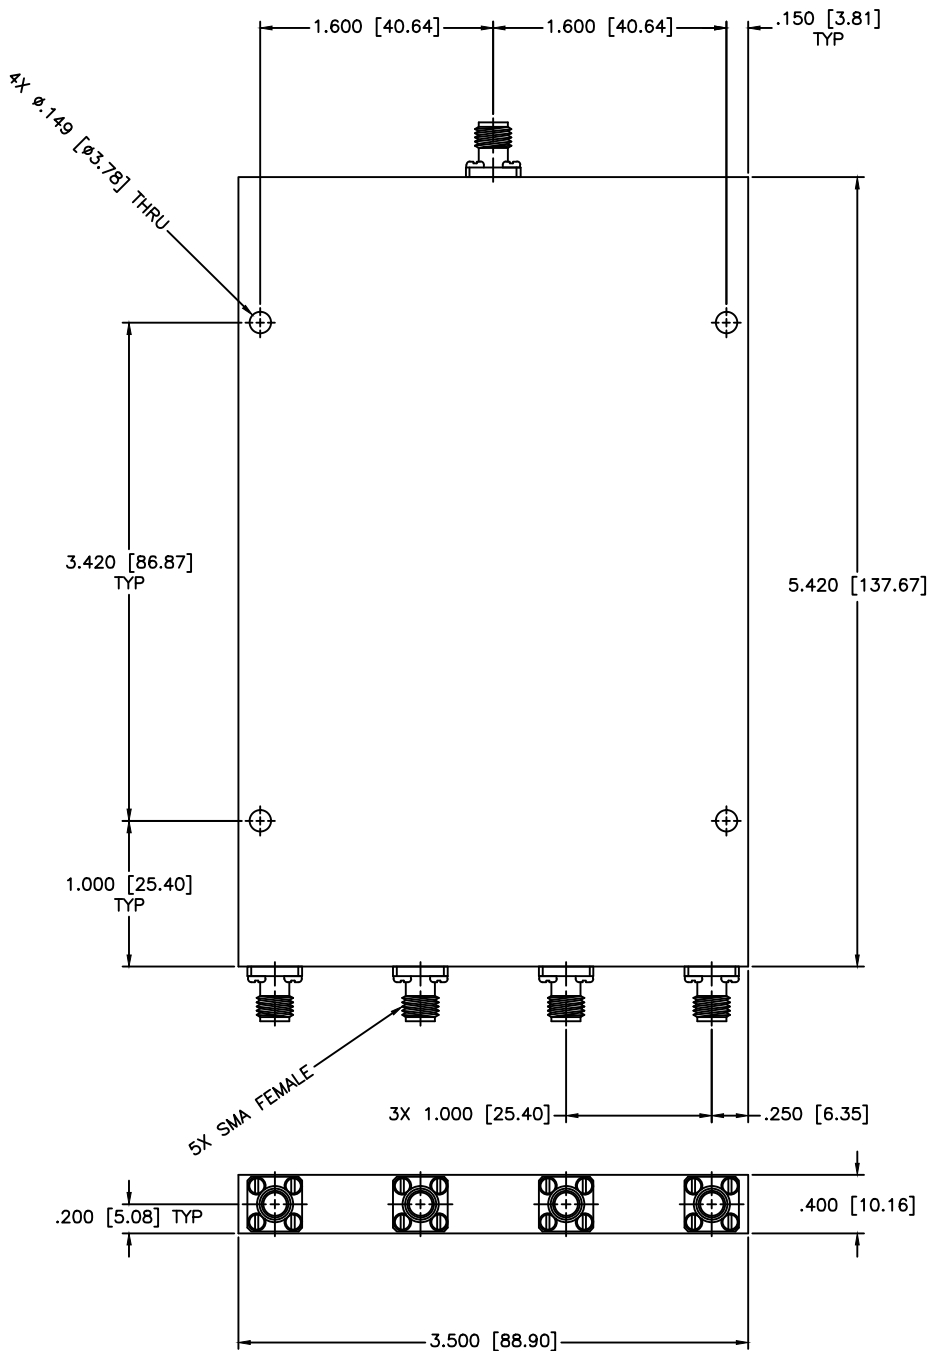

SPECIFICATIONS

Frequency Range: 0.3–6.0 GHz
 Insertion Loss: 1.5dB Max.
 Isolation: 18dB Min.
 VSWR Input/Output: 1.50:1 Max.
 Phase Balance: ± 5 Deg. Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power Rating: 20 Watts

MATERIAL:		MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8116 http://www.mcll.com	SCALE: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER			SHEET: N/A
PART NO. PS4-152		DRAWING TITLE: 4-WAY POWER DIVIDER	
DRAWN: Paiboon Luexhamhan	DATE: 04-27-2012	PART NO. PS4-152	
APPROVED: T. Nguyen	DATE: 04-27-2012	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO. 86087
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.02 \pm 0.08$ ANGLE: $\pm 1/2^\circ$</small>		<small>DO NOT SCALE THE DRAWING</small>	