


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

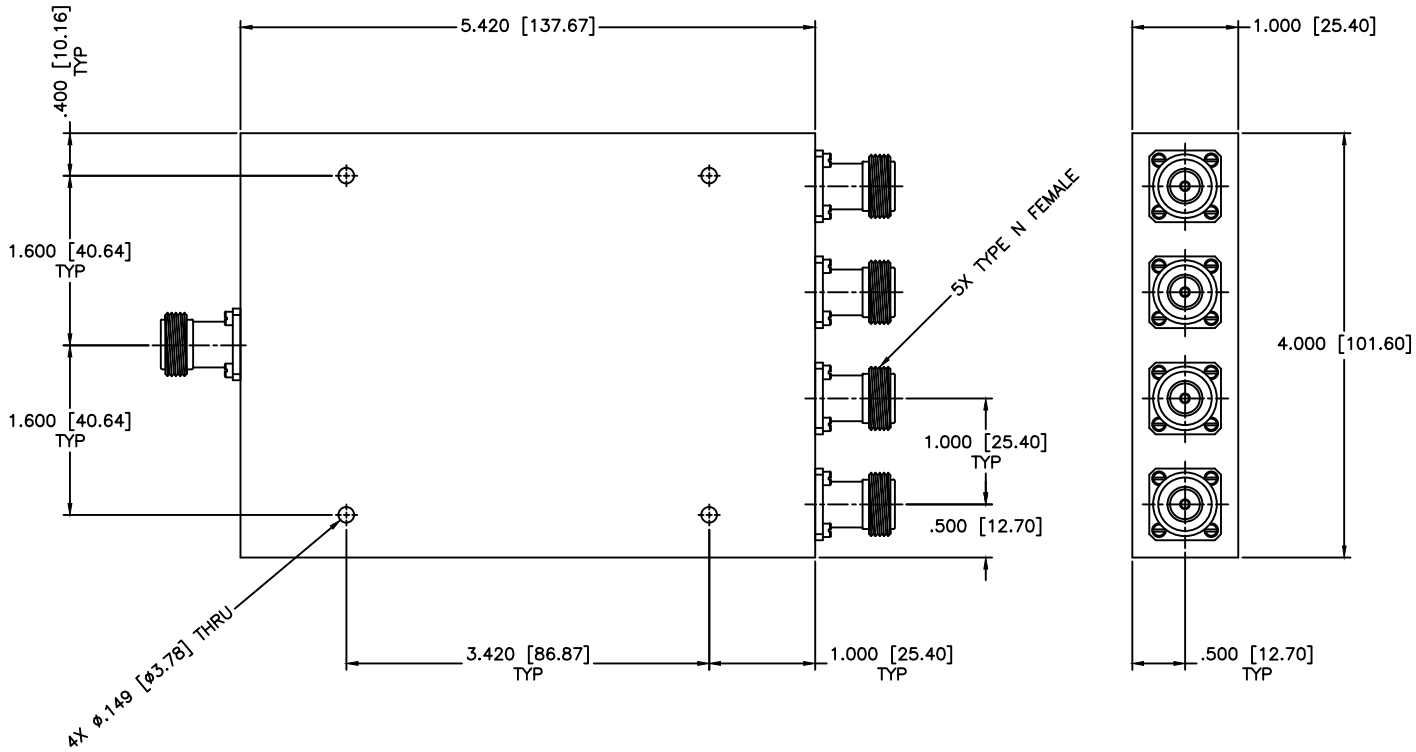

SPECIFICATIONS

Frequency Range: 0.3–6.0 GHz
 Insertion Loss: 1.5dB Max.
 Isolation: 18dB Min.
 VSWR: 1.50:1 Max.
 Phase Balance: ±5 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 Power: 30 Watts

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6110 http://www.MCLI.COM		SCALE: N/A
DRAWING TITLE:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
PART NO.:		PS4-152/NF		PART NO.:		
DATE:	05-09-2012	DATE:	05-09-2012	CAGE CODE:	OD2L5	SIZE: N/A
APPROVED:	T. Nguyen	DATE:	05-09-2012	REV:	N/A	REV: N/A
DRAWN: Paboon Luethamhan				DO NOT SCALE THE DRAWING		DWG NO. 86086