


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

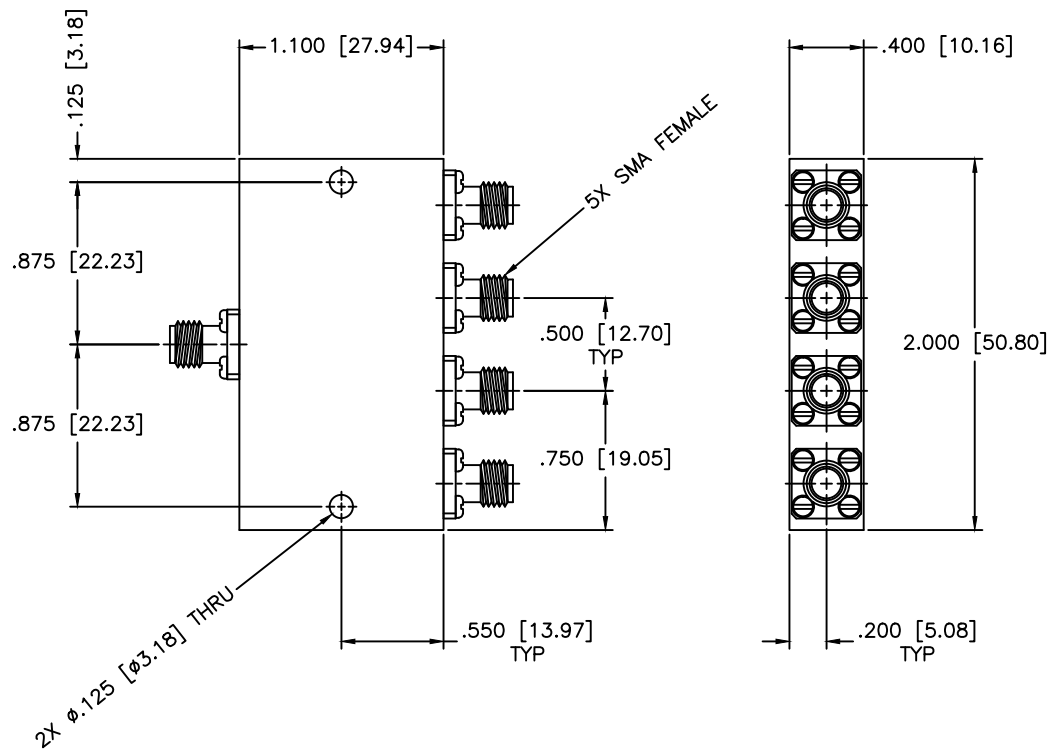

SPECIFICATIONS

Frequency Range: 15–26 GHz
 VSWR In/Out: 1.65:1/1.60:1 Max.
 Amplitude Balance: ±0.8dB Max.
 Phase Balance: ±12 Deg. Max.
 Insertion Loss: 2.6dB Max.
 Isolation: 15dB Min.
 Power Rating: 20W (VSWR @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
DRAWING TITLE: 4-WAY POWER DIVIDER			SHEET:	N/A		
PART NO. PS4-153		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		
DRAWN: Paiboon Luekhamhan	DATE: 06-15-1998	CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 81311	
APPROVED: T. Nguyen	DATE: 06-15-1998	THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		