


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 1–5 GHz
 VSWR In/Out: 1.40:1/1.35:1 Max.
 Insertion Loss: 0.8dB Max.
 Isolation: 18dB Min.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±6 Deg. Max.
 Power Rating: 30W (vswr@1.2)
 Operating Temperature: –55°C to +85°C

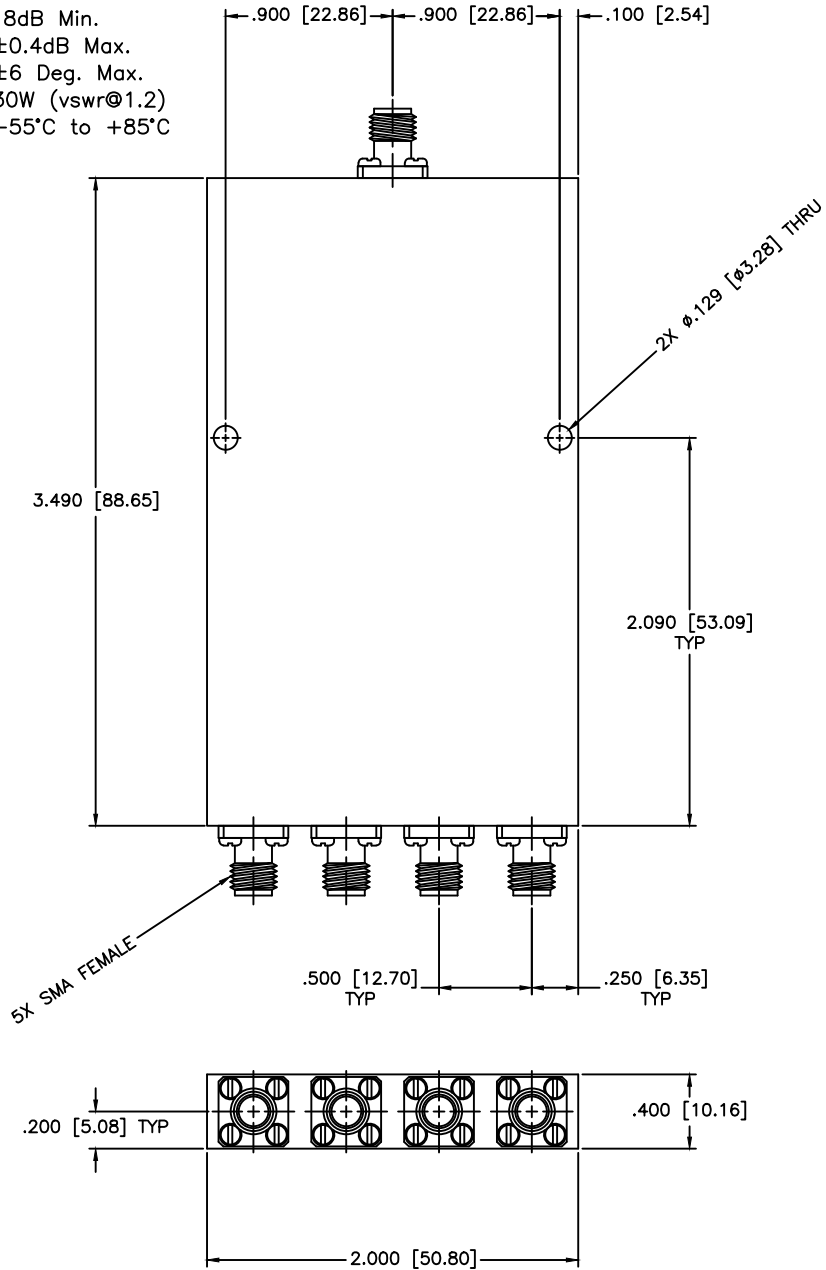

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWN:		DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.	
Paiboon Luekhamhan T. Nguyen		12-07-2011 12-07-2011	THIRD ANGLE PROJECTION 		PS4-157	
APPROVED:		DATE:	CAGE CODE:	SIZE:	REV:	DWG NO.
			OD2L5	A	A	81514
DO NOT SCALE THE DRAWING						