


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

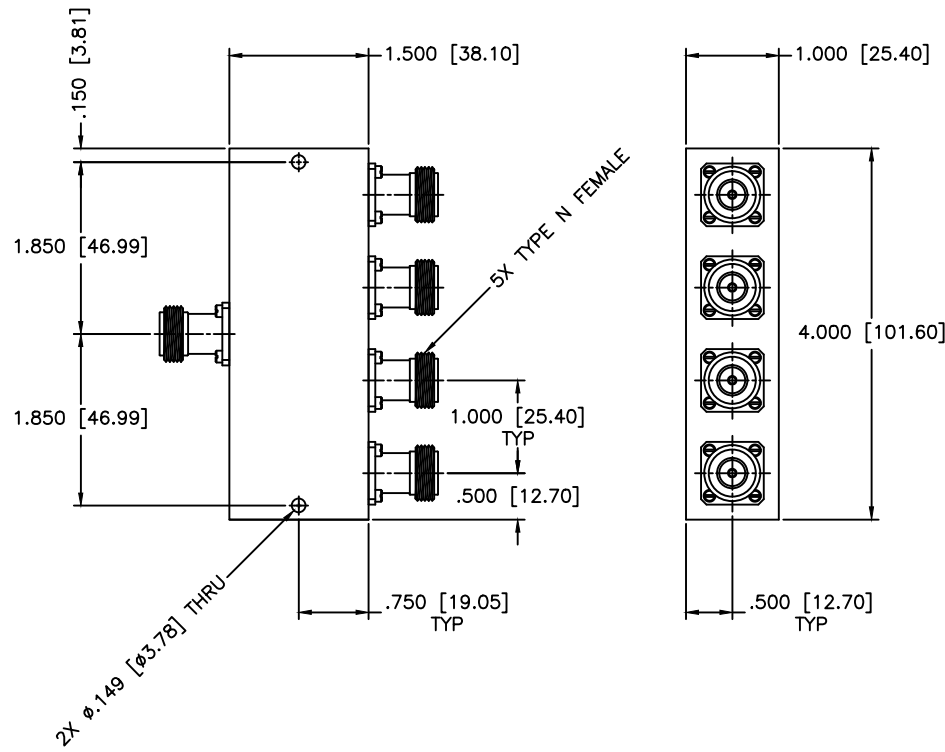

SPECIFICATIONS

Frequency Range: 2.3–2.35 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 18dB Min.
 VSWR: 1.40:1 Max.
 Power: 30W CW
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±6 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 03-01-1998		PART NO.: PS4-161/NF	
APPROVED: T. Nguyen		DATE: 03-01-1998		CAGE CODE: OD2L5	SIZE: C
THIRD ANGLE PROJECTION		REV: N/A		DWG NO.: 82974	
				DO NOT SCALE THE DRAWING	

