


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

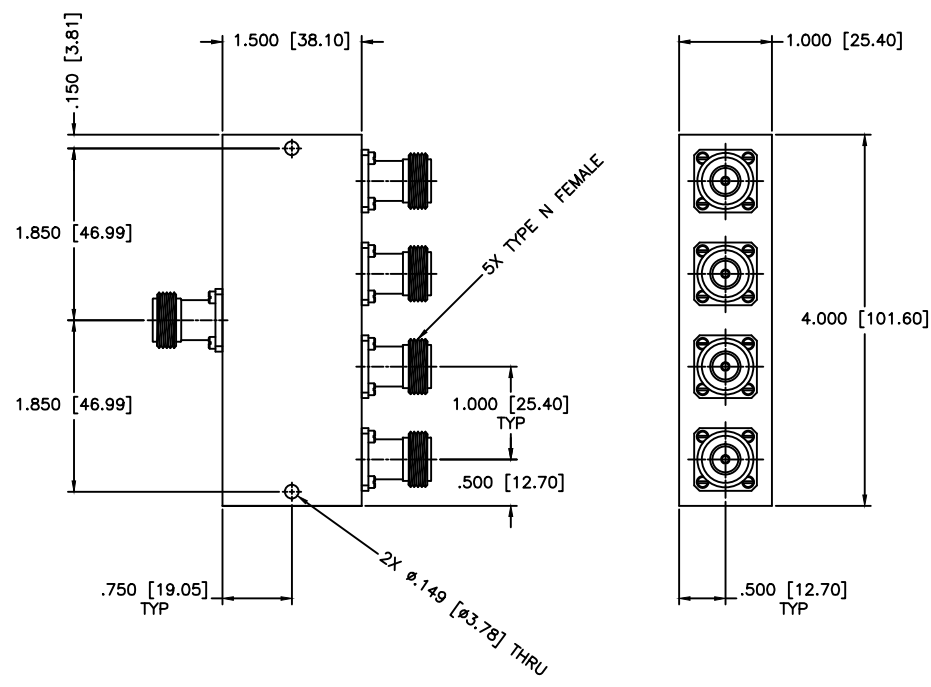

SPECIFICATIONS

Frequency Range: 13.75–14.5 GHz
 Insertion Loss: 2.5dB Max.
 Isolation: 12dB Min.
 VSWR In/Out: 1.80:1/1.70:1 Max.
 Power: 30W CW
 Amplitude Balance: ±0.5dB Max.
 Phase Balance: ±12 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER		
DRAWING: Paiboon Luethamhan		PART NO.: PS4-167/NF		
DATE: 08-24-2011	DATE: 08-24-2011	CAGE CODE: OD2L5	SIZE: C	REV: N/A
APPROVED: T. Nguyen	DATE: 08-24-2011	DO NOT SCALE THE DRAWING		DWG NO.: 85856

